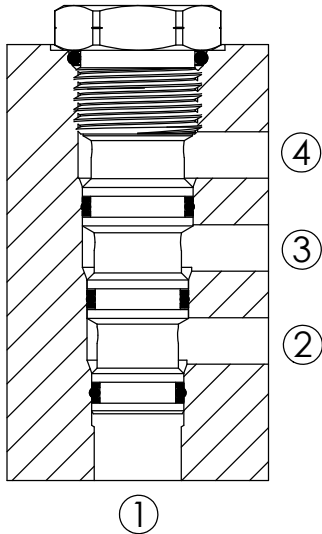
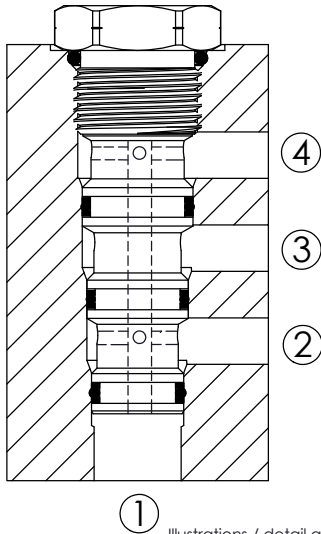


Ordering Code:	<b>CP-X-Y-Z-***</b>	<b>X</b>	<b>CAVITY-THREADS</b>
	*** Mfg. Code	<b>08W</b>	3/4"-16UNF-2B
Example:CP-10W-4H-00	Example:CP-10W-4H-124	<b>10W</b>	7/8"-14UNF-2B
		<b>12W</b>	1-1/16"-12UN-2B
		<b>16W</b>	1-5/16"-12UN-2B
		<b>20WS</b>	1-5/8"-12UN-2B
		<b>Y</b>	<b>PORTS</b>
		<b>4H</b>	4 Holes

Illustrations / detail are for reference only. Data subject to change.

<b>Z</b>	<b>OPERATIONS</b>					
<b>00</b>	All Ports Blocked	08W	10W	12W	16W	20WS
<b>12</b>	Ports ① and ② Open Other Ports Blocked	08W	10W	12W	16W	20WS
<b>13</b>	Ports ① and ③ Open Other Ports Blocked	08W	10W	12W	16W	
<b>14</b>	Ports ① and ④ Open Other Ports Blocked	08W	10W	12W	16W	
<b>23</b>	Ports ② and ③ Open Other Ports Blocked	08W	10W	12W	16W	
<b>24</b>	Ports ② and ④ Open Other Ports Blocked	08W	10W	12W	16W	
<b>34</b>	Ports ③ and ④ Open Other Ports Blocked	08W	10W	12W	16W	
<b>123</b>	Ports ①,② and ③ Open Other Ports Blocked	08W	10W	12W	16W	
<b>124</b>	Ports ①,② and ④ Open Other Ports Blocked	08W	10W	12W	16W	
<b>234</b>	Ports ②,③ and ④ Open Other Ports Blocked	08W	10W	12W	16W	
<b>1234</b>	All Ports Open	08W	10W	12W	16W	
PS. CP08W4H1234 as same as CP08W2H12						
<b>34-12</b>	Ports ① and ② Open Ports ③ and ④ Open Ports ② and ③ Blocked	08W	10W	12W	16W	