


PNEUMATIC OPERATED VALVE (Pneumatic Operated Poppet 2-Way Normally Closed)

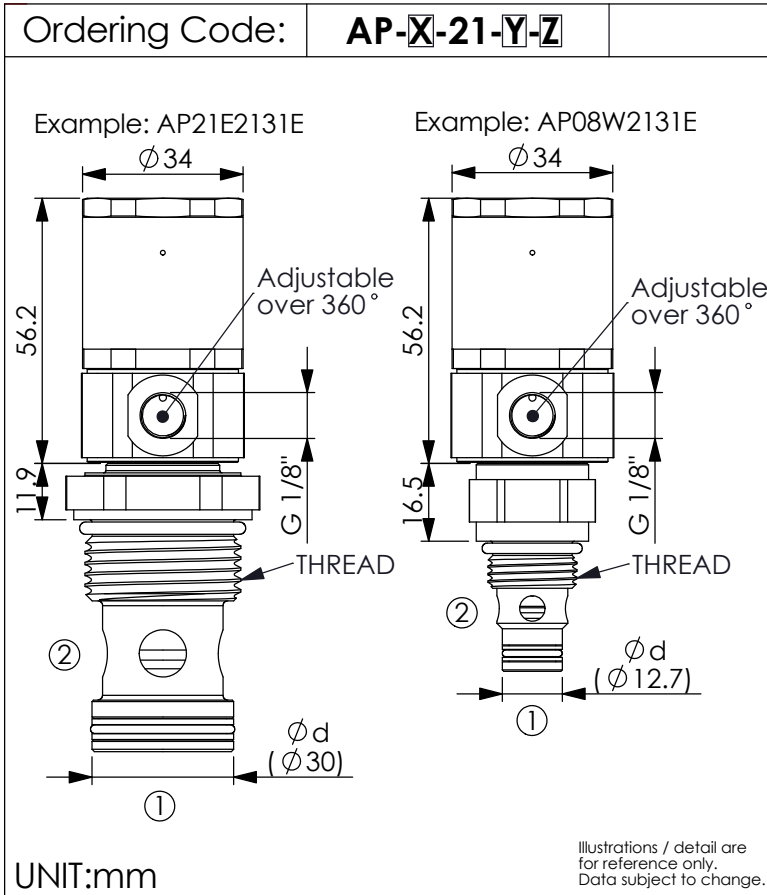








TECHNICAL DATA	
Max. pressure:	350 bar
Filtration:	25 µm nominal or better
Mounting Position:	unrestricted
IMPORTANT: Please contact our Sales Department for any information.	

Y	OPERATIONS	
	SYMBOLS	DESCRIPTIONS
01		Please pay attention to the flow direction and arrow direction of the check valve on symbol.
03		For example: when Y = 01, only allow the flow from port ② to port ① when giving pneumatic pressure.
05		
07		IMPORTANT: Please contact the sales dept. of Winner Hydraulics Corp. for more detailed technical information.
09		
11		
31		

X	OPTIONS	
	THREADS	Ød
08W	3/4"-16UNF-2A	Ø 12.7
10W	7/8"-14UNF-2A	Ø 15.87
12W	1-1/16"-12UN-2A	Ø 22.22
16W	1-5/16"-12UN-2A	Ø 28.6
17E	G 3/4"	Ø 23.5
19E	3/4"-16UNF-2A	Ø 15.87
21E	G 1"	Ø 30
13A	M20x1.5	Ø 17.45
20M	M20x1.5	Ø 15

Z	PNEUMATIC PILOT PRESSURE	
E	MIN.	MAX.
	4 bar	15 bar

PNEUMATIC OPERATED VALVE (Pneumatic Operated Poppet 2-Way Normally Closed)

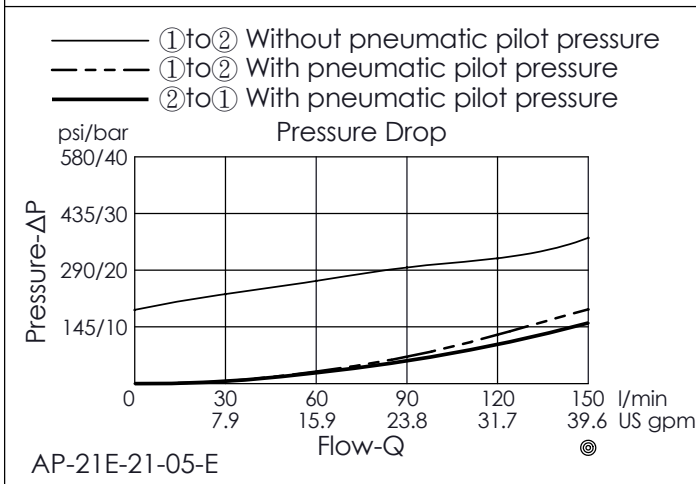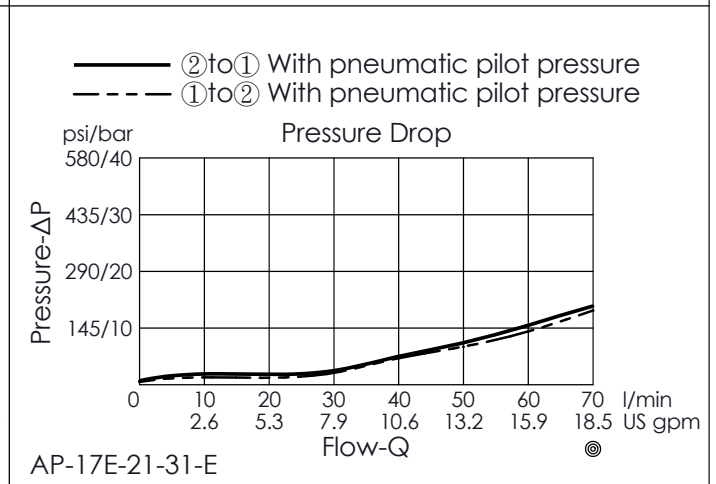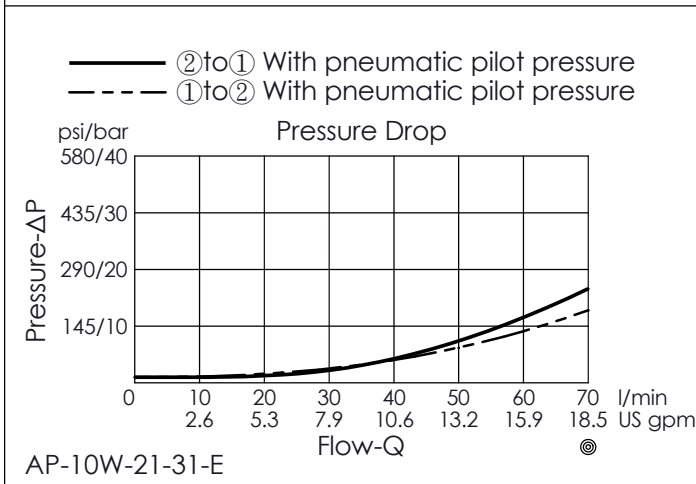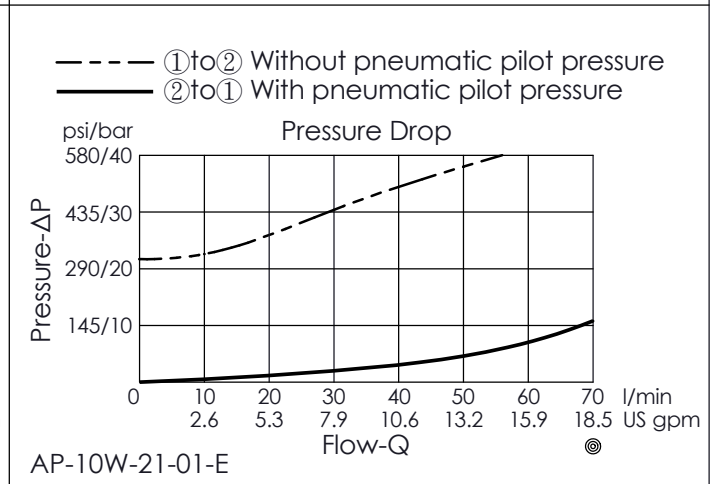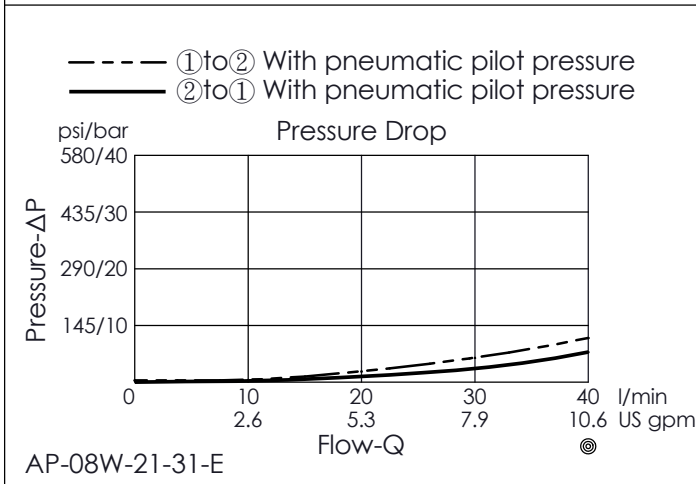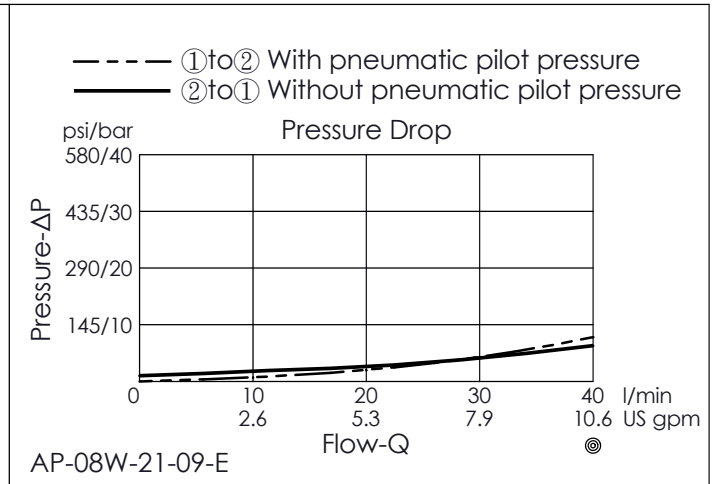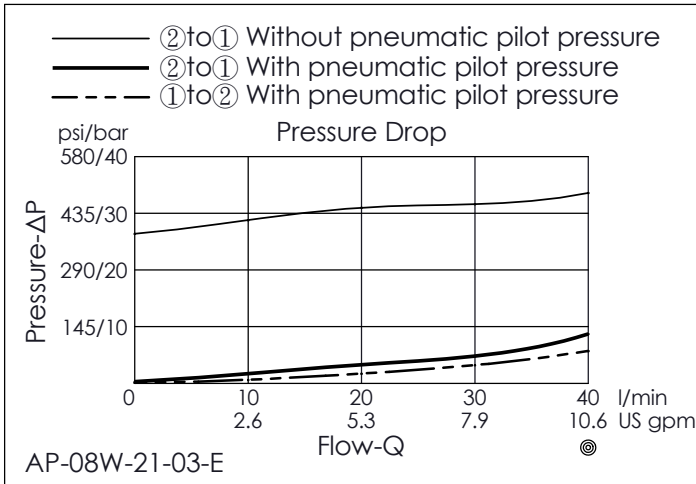

The performance curve or data is only for reference, as customers' using condition, pressure, flow, hydraulic fluid viscosity, cleanliness, temperature and so on are different, the curve or data will be different.