


TECHNICAL DATA		
Max. Setting:	350	bar
Rated flow:	160 l/min From Port ① to ② 240 l/min From Port ② to ①	
Cavity-Tooling:	17A-3	
Installation torque:	200 - 215	Nm
Weight:	0.61 (Z=L)	kg
Pressure Setting:	Setting should be 1.3 times maximum load induced pressure. (We suggest when the Max. setting pressure is 350 bar, the load pressure has to be lower than 270 bar.)	

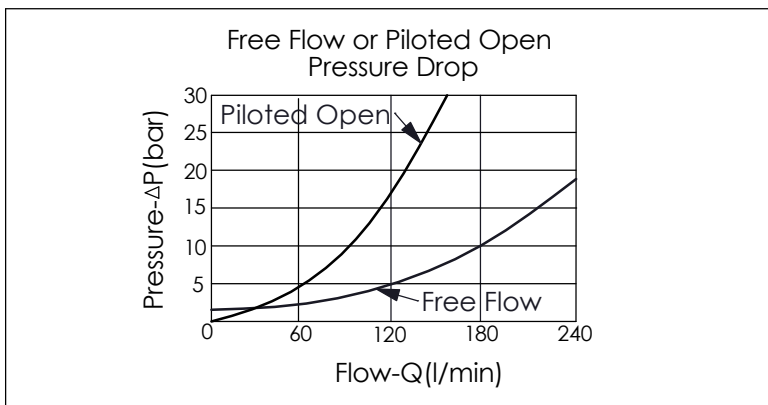

X	PILOT RATIO	
3D	4.5 : 1 (with sealed pilot)	

Y	SPRINGS	
	ADJUSTMENT RANGES(1.7 bar Cracking Pressure)	
J	140 - 350 bar (210 bar Standard Setting)	
K	70 - 175 bar (140 bar Standard Setting)	
	SPECIAL PURPOSES(0.3 bar Cracking Pressure)	
C	140 - 350 bar (210 bar Standard Setting)	
D	70 - 175 bar (140 bar Standard Setting)	

Z	OPTIONS	
L	Leakproof hex. socket screw.	
C	Stainless Steel Tamper Resistant Cover.	