



## COUNTERBALANCE VALVE (Fixed Setting)

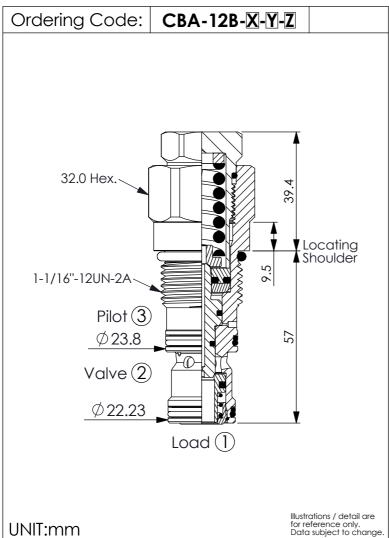




TECHNICAL DATA				
Max. operating pre	ssure: 35	0 bar		
Rated flow:	120	l/min		
Cavity-Tooling:	12B-3			
Installation torque:	95 - 100	Nm		
Weight:	0.338	kg		
Pressure Setting:				

Setting should be 1.3 times maximum

load induced pressure.
(We suggest when the Max. setting pressure is 350 bar, the load pressure has to be lower than 270 bar.)

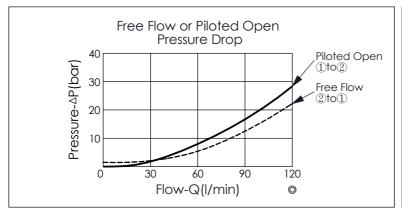

X	PILOT RATIO	
34	4:1	

Υ	SPRINGS	
	FIXED SETTING	
225	210 - 240 bar	

Z	OPTION
N	Non-adjustable 2.0 bar Cracking Pressure

Rev.230502 B.121.731.E