


TECHNICAL DATA	
Max. Operating pressure:	350 bar
Rated flow:	480 l/min
Cavity-Tooling:	19A-3 (19AB-3)
Installation torque:	465 - 500 Nm
Weight:	1.39 (Z=N) kg 1.38 (Z=S04)
<ul style="list-style-type: none"> Maximum Leakage Approximately (0.07 cc/min.) Approximately 1 drop (0.07 cc) of fluid will pass from the pilot area to the vented spring chamber every 4000 cycles. 	

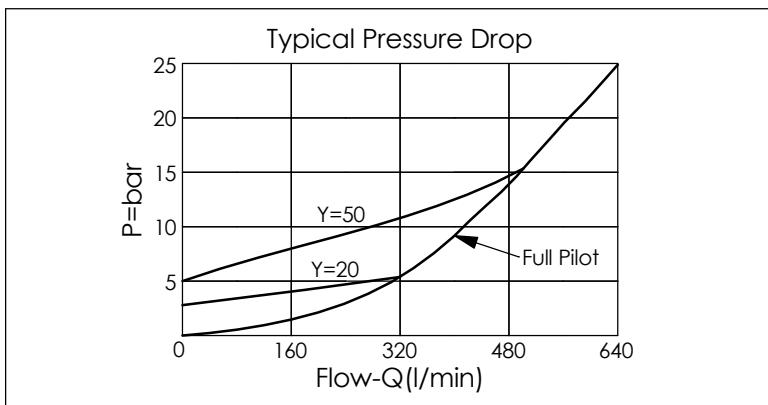

X	OPERATION	
3C	② to ① (Free Flow)	Sealed Pilot Piston Pilot Ratio 3:1

Y	SPRINGS	
	Cracking pressure	
03	0.3 bar	
10	1.0 bar	
20	2.0 bar	
35	3.5 bar	
50	5.0 bar	
70	7.0 bar	

Z	OPTION	
N	Non-adjustable	
S04	External SAE-4 Port (7/16"-20UNF-2B)	