


TECHNICAL DATA	
Max. Operating pressure:	350 bar
Rated flow:	480 l/min
Cavity-Tooling:	24A-4 (24AB-4)
Installation torque:	465 - 500 Nm
Weight:	1.53 (Z=N) kg
<ul style="list-style-type: none"> <li>Maximum Leakage Approximately (0.07 cc/min.)</li> <li>Approximately 1 drop (0.07 cc) of fluid will pass from the pilot area to the vented spring chamber every 4000 cycles.</li> </ul>	

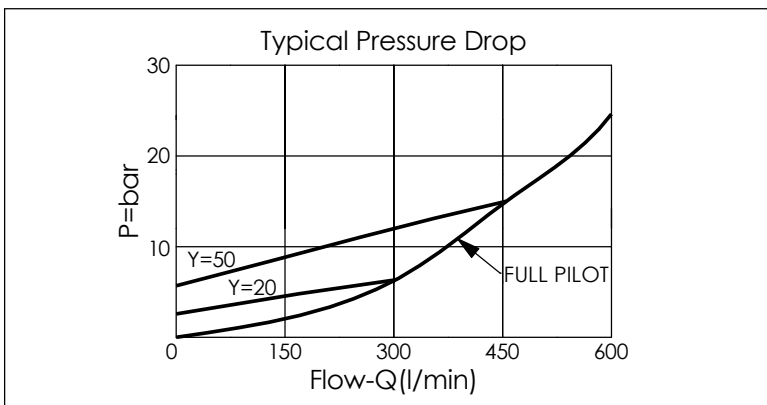

X	OPERATION	
4C	② to ① (Free Flow)	
	Sealed Pilot Piston	
	Pilot Ratio 3:1	

Y	SPRINGS	
	Cracking pressure	
03	0.3 bar	
10	1.0 bar	
20	2.0 bar	
35	3.5 bar	
50	5.0 bar	
70	7.0 bar	

Z	OPTION	
N	Non-adjustable	
L	Leakproof hex. socket screw.	