


TECHNICAL DATA		
Max. Operating pressure:	240 bar	
Rated flow:	30	l/min
Cavity-Tooling:	08W-3	
Installation torque:	25-35	Nm
Weight:	0.12	kg

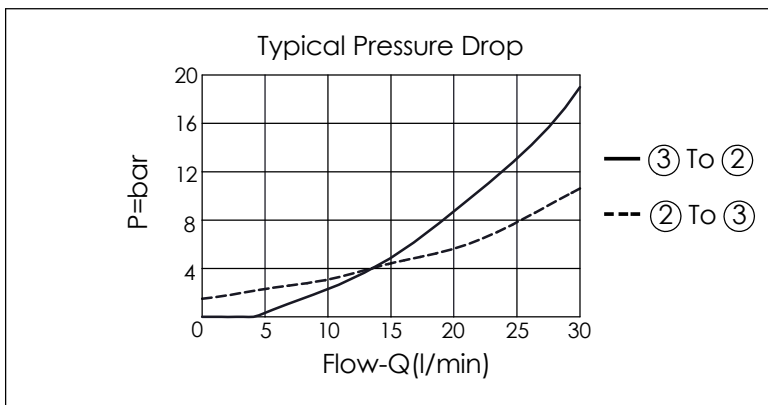

X	OPERATION	
30	② to ③ Free Flow (Pilot to Open) Pilot Ratio 2:1 (Check Spring Bias) (Min. 1.7 bar)	
3A	② to ③ (Free Flow) Sealed Pilot Piston Pilot Ratio 2:1 (Check Spring Bias) (Min. 4.1 bar)	

Y	SPRINGS	
	Cracking pressure	
17	1.7 bar	
41	4.1 bar	
69	6.9 bar	
103	10.3 bar	
138	13.8 bar	
176	17.6 bar	

Z	OPTION	
L	Leakproof hex. socket screw.	