


TECHNICAL DATA		
Max. Operating pressure: 350 bar		
Rated flow:	120	l/min
Cavity-Tooling:	2A-3	
Installation torque:	60 - 70	Nm
Weight:	0.235 (Z=N)	kg

X	OPERATION	
30	② to ① (Free Flow)	Pilot Ratio 3:1
3C	② to ① (Free Flow)	Sealed Pilot Piston Pilot Ratio 3:1

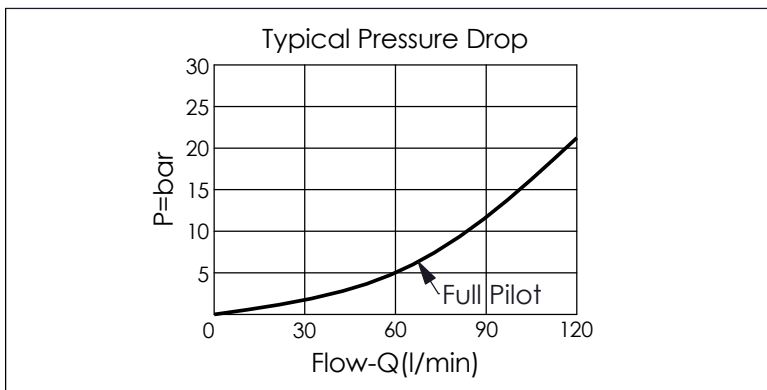

Y	SPRINGS	
	Cracking pressure	
00	0 bar (without spring)	
015	0.15 bar	
03	0.3 bar	
10	1.0 bar	
20	2.0 bar	
35	3.5 bar	
50	5.0 bar	
70	7.0 bar	

Z	OPTION	
N	Non-adjustable	
NP	Non-adjustable With stainless steel external metal components (Buna-N Seal)	
L	Leakproof hex. socket screw.	
LP	Leakproof hex. socket screw. With Stainless Steel external metal components	
K	Handknob with Lock Knob. (Order Code: 6ZAK001)	