



## CHECK VALVE (Pilot-To-Open)

Ordering Code: CO-08W-X-Y-Z






TECHNICAL DATA				
Max. pressure:	240	bar		
Rated flow:	30	l/min		
Cavity-Tooling:	08W-3			
Installation torque:	25 - 35	Nm		
Weight:	0.06	kg		

**UNIT:mm** 

Illustrations / detail are for reference only. Data subject to change

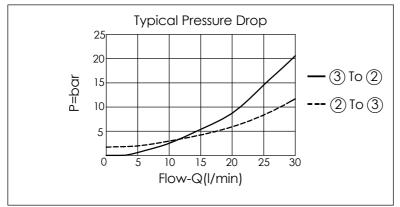

X	OPERATION	
33	② to ③ (Free Flow) Pilot Ratio 3:1	
3C	2) to (3) (Free Flow) Sealed Pilot Piston Pilot Ratio 3:1 (Check Spring Bias) (Min. 4.8 bar)	

Υ	SPRINGS		
•	Cracking pressure		
17	1.7 bar		
48	4.8 bar		
62	6.2 bar		
82	8.2 bar		
		-	

Z	OPTION	
N	Non-adjustable	

B.137.121.E

Rev.221104