
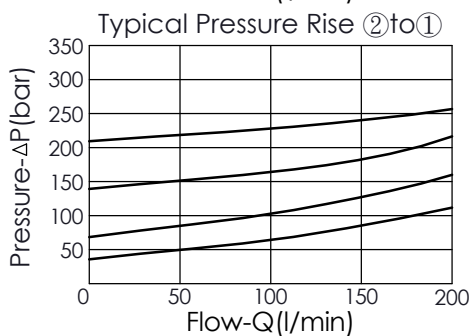


TECHNICAL DATA

Max. Operating pressure:	350	bar
Rated flow:	120	l/min
Cavity-Tooling:	3A-2	
Installation torque:	60 - 70	Nm
Weight:	0.30	kg

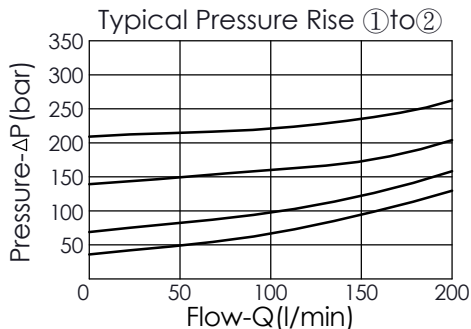


X OPERATION

20 Standard Type


- Response Time-Typical (2 ms)
- Maximum Leakage Approximately (0.7 cc/min.)
- Dirt tolerant

Z OPTIONS

L Leakproof hex. socket screw.



K Handknob with Lock Knob.
(Order Code: 6ZAK001)



Y SPRINGS

ADJUSTMENT RANGES

C	105 - 420 bar (105 bar Standard Setting)
W	55 - 315 bar (70 bar Standard Setting)