


TECHNICAL DATA	
Max. Operating pressure:	350 bar
Rated flow:	480 l/min
Cavity-Tooling:	18A-2 (18AB-2)
Installation torque:	465 - 500 Nm
Weight:	0.93 kg

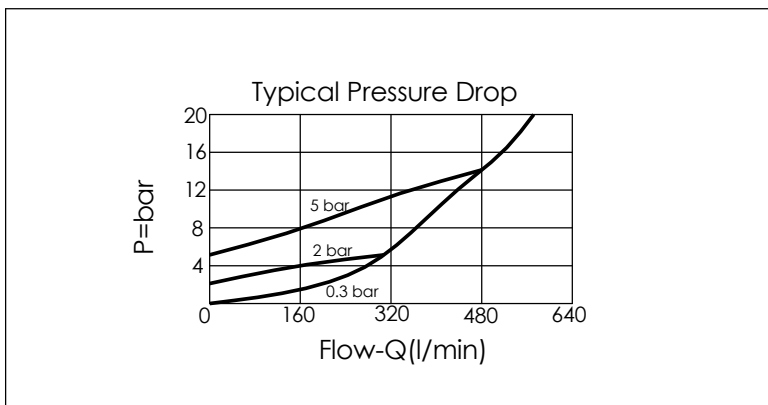

X	OPERATION	
21	② to ① (Free Flow)	

Y	SPRINGS	
	Cracking pressure	
015	0.15 bar	
03	0.3 bar	
10	1.0 bar	
20	2.0 bar	
35	3.5 bar	
50	5.0 bar	
70	7.0 bar	

Z	OPTION	
N	Non-adjustable	
NP	Non-adjustable With stainless steel external metal components (Buna-N Seal)	