


CHECK VALVE (Free flow side to nose check valve)

Ordering Code: **CV-08W-X-Y-Z**

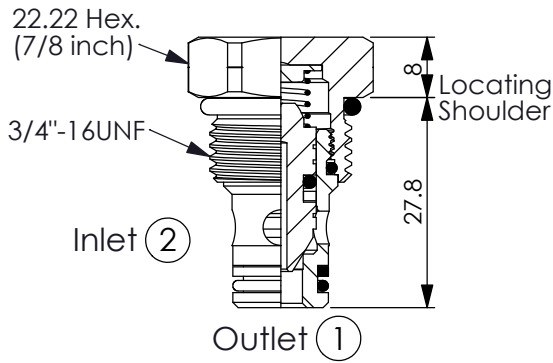

UNIT:mm

Illustrations / detail are for reference only. Data subject to change.



TECHNICAL DATA

Max. pressure: 240 bar


Rated flow: 30 l/min

Cavity-Tooling: 08W-2

Installation torque: 28 - 35 Nm

Weight: 0.05 kg

Installation Leakage Approximately:
5 drops/minute max. at 240bar

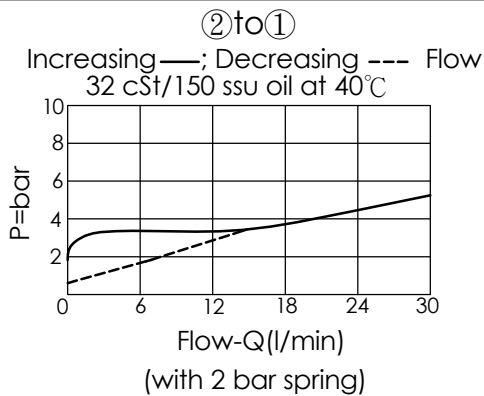

X OPERATION

2A ② to ① (Free Flow)
(with Sealed)

Y

SPRINGS

Cracking pressure

20 2.0 bar

50 5.0 bar

Z

OPTION

N Non-adjustable 