
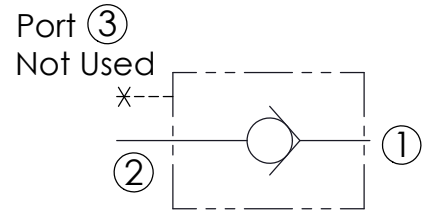


CHECK VALVE

(Free Flow Nose to Side, Port ③ Blocked)

Ordering Code: **CV-2A-X-Y-Z**

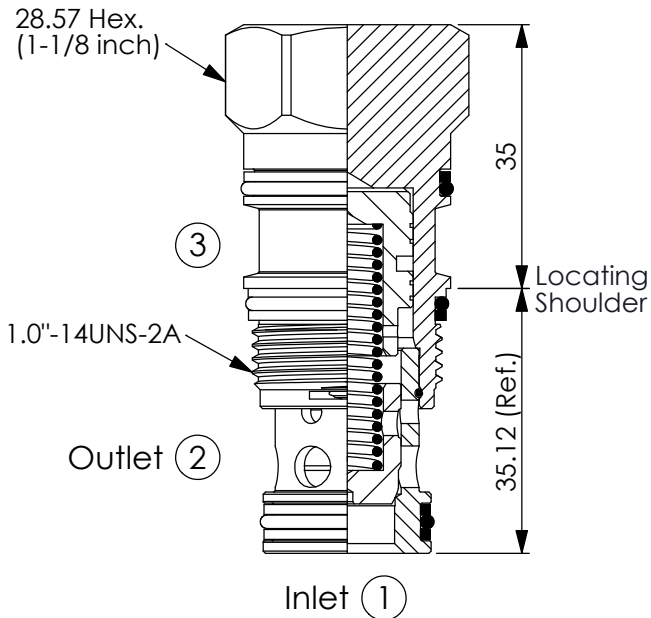


TECHNICAL DATA

Max. pressure:	350	bar
Rated flow:	160	l/min
Cavity-Tooling:	2A-3	
Installation torque:	60 - 70	Nm
Weight:	0.22	kg

UNIT:mm

Illustrations / detail are for reference only. Data subject to change.

Typical Pressure Drop

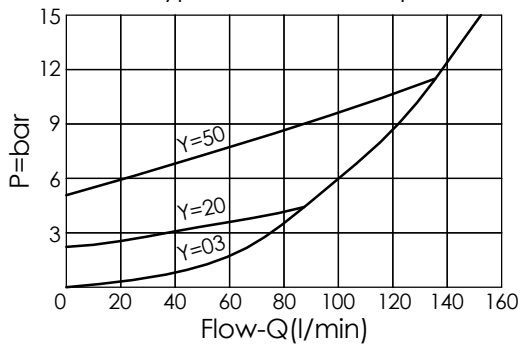

X OPERATION

20 ① to ② (Free Flow)

Y SPRINGS

Cracking pressure

03	0.3 bar
10	1.0 bar
20	2.0 bar
50	5.0 bar
70	7.0 bar

Z OPTION

N Non-adjustable 