


TECHNICAL DATA	
Max.Operating pressure:	400 bar
Rated flow:	300 l/min
Cavity-Tooling:	20WS-4
Installation torque:	150 - 160 Nm
Weight:	0.92 kg

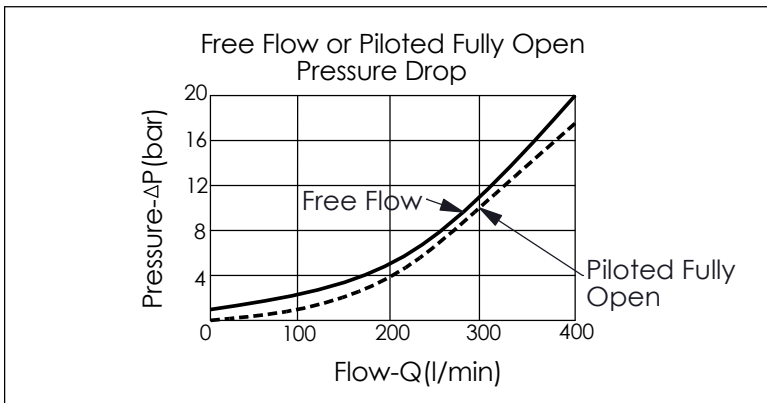

X	OPERATION	
4N	with seal pilot	Balanced

Y	SPRINGS	
	PILOT ADJUSTMENT RANGES	
0200	5 - 20 bar (10 bar Standard Setting Standard Setting made at 4.8 litres/min)	

Z	OPTIONS	
L	Leakproof hex. socket screw.	
CH	Plastic Tamper Resistant Cover of General Type Hex. Nut (Order Code:5JAA097)	