


TECHNICAL DATA	
Max. Operating pressure:	350 bar
Rated flow:	60 l/min
Cavity-Tooling:	21A-4
Installation torque:	40 - 50 Nm
Weight:	0.16 (Z=L) kg

X	OPERATION
4N	with sealed pilot Balanced
	<ul style="list-style-type: none"> Response Time-Typical (2 ms) Maximum Leakage Approximately (0.7 cc/min.)

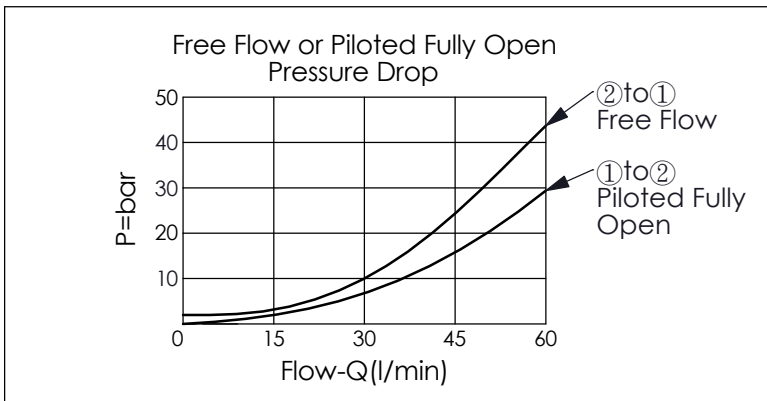

Y	SPRINGS	
	PILOT ADJUSTMENT RANGES	
1050	20 - 105 bar	(70 bar Standard Setting)
2100	35 - 210 bar	(70 bar Standard Setting)

Z	OPTIONS	
L	Leakproof hex. socket screw.	
C	Stainless Steel Tamper Resistant Cover.	
CB	Plastic Tamper Resistant Cover (Order Code:5JAA093)	