



Ordering Code: **DD-21A-X-Y-Z**

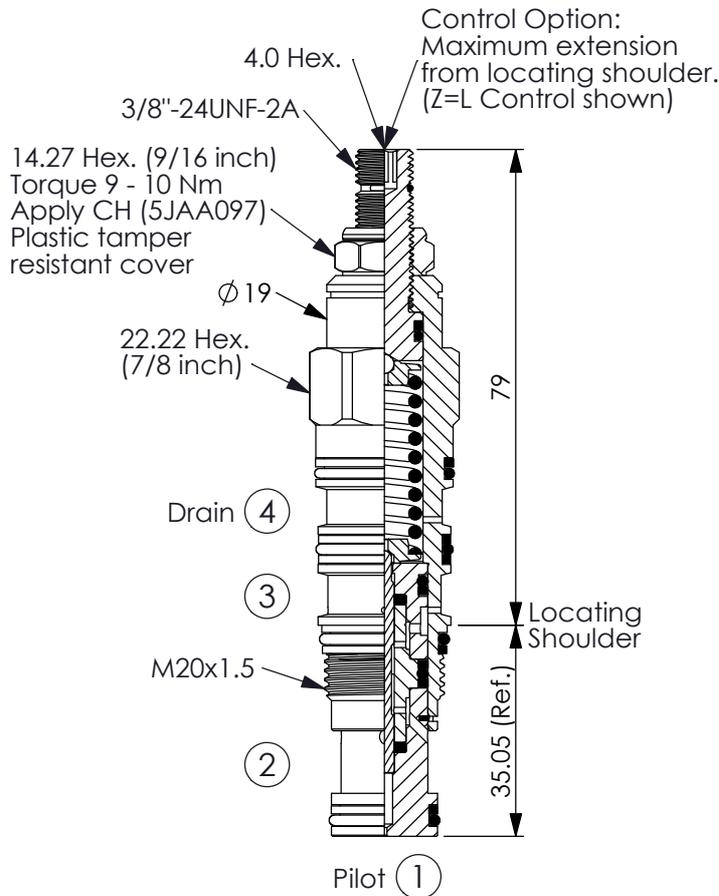


UNIT:mm

Illustrations / detail are  
for reference only.  
Data subject to change.

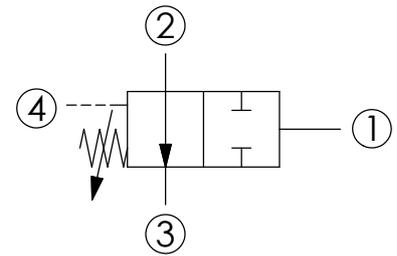

### TECHNICAL DATA

Max. pressure:	350	bar
Rated flow:	2	l/min
Cavity-Tooling:	21A-4	
Installation torque:	40 - 50	Nm
Weight:	0.195 (Z=L)	kg

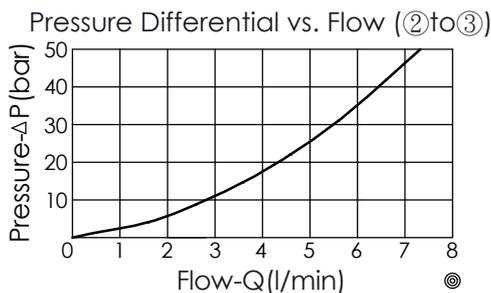

### X OPERATION

**45** Normally-Open,  
Port ② to Port ③,  
Port ① pilot to shift,  
Closed Port ② to Port ③

• Maximum Leakage Approximately  
(20 drops/min.)

### Y PRESSURE SETTING

**A** 70 - 210 bar (70 bar Standard Setting)

**C** 140 - 420 bar (140 bar Standard Setting)

### Z OPTIONS

**L** Leakproof hex.  
socket screw.



**C** Stainless Steel  
Tamper Resistant  
Cover.

