

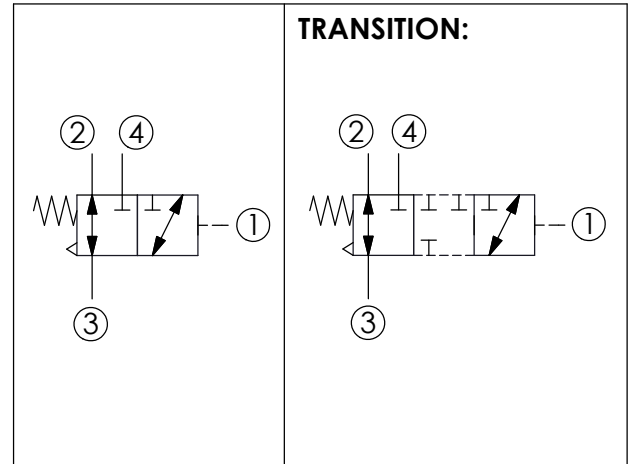


## DIRECTIONAL VALVE (Piloted 2-Position 3-Way Spool) (Vented, Atmospherically Referenced)

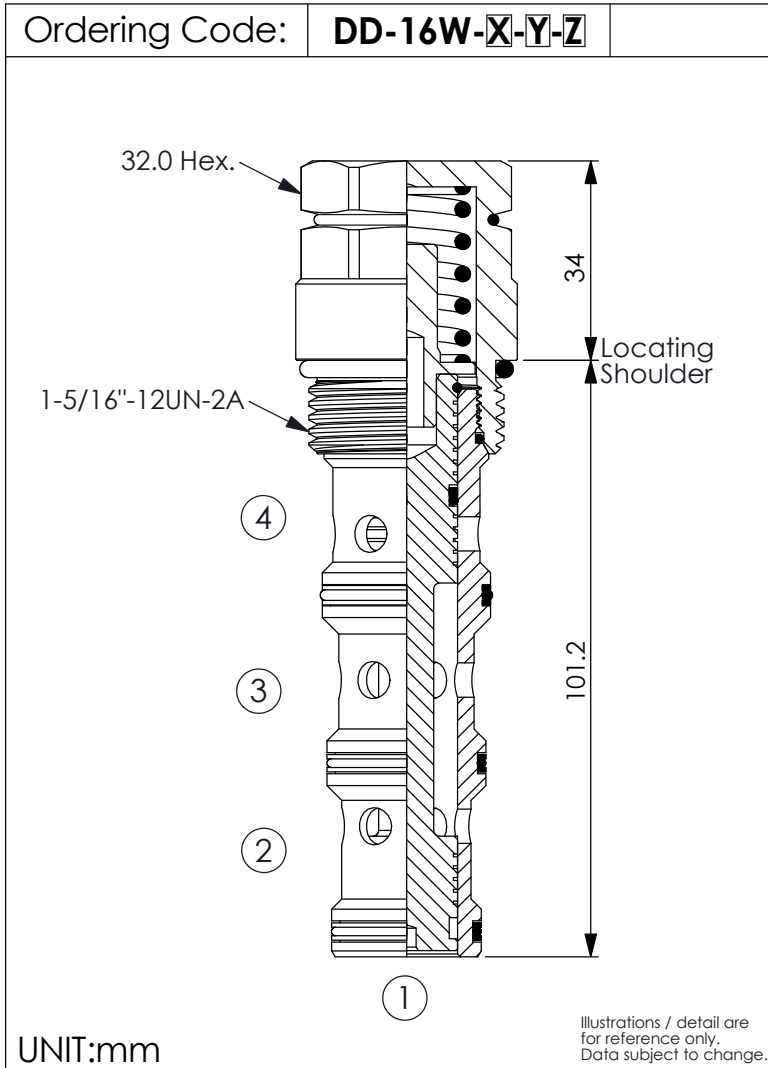

| TECHNICAL DATA  |         |       |
|---|---------|-------|
| Max. pressure:  | 240     | bar   |
| Rated flow:   | 170     | l/min |
| Cavity-Tooling:   | 16W-4   |       |
| Installation torque:  | 60 - 70 | Nm    |
| Weight:   | 0.52    | kg    |
| • Approximately 1 drop (0.07 cc) of fluid will pass from the pilot area to the vented spring chamber every 4000 cycles. |         |       |

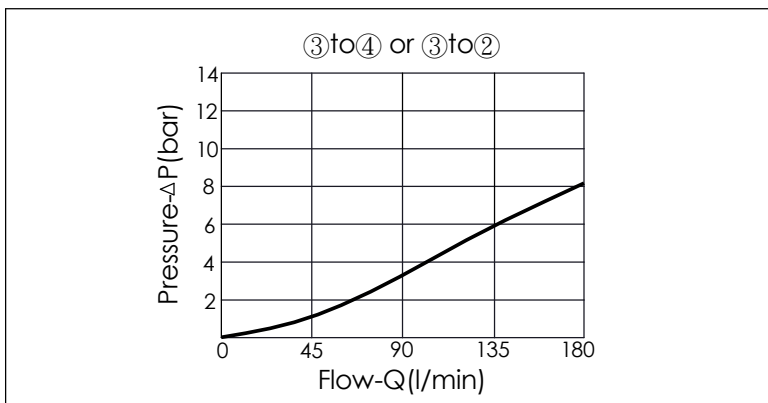

| X         | OPERATION   |  |
|-----------|---|--|
| <b>4S</b> | Port ② to Port ③;<br>Port ① pilot to shift,<br>Port ③ to Port ④ |  |

| Y          | SPRINGS           |  |
|------------|-------------------|--|
|            | Cracking pressure |  |
| <b>70</b>  | 7.0 bar           |  |
| <b>117</b> | 11.7 bar          |  |

| Z        | OPTIONS        |  |
|----------|----------------|--|
| <b>N</b> | Non-adjustable |  |