


TECHNICAL DATA

Max. Operating pressure:	350	bar
Rated flow:	60	l/min
Cavity-Tooling:	2A-3	
Installation torque:	60 - 70	Nm
Weight:	0.260 (Z=L)	kg

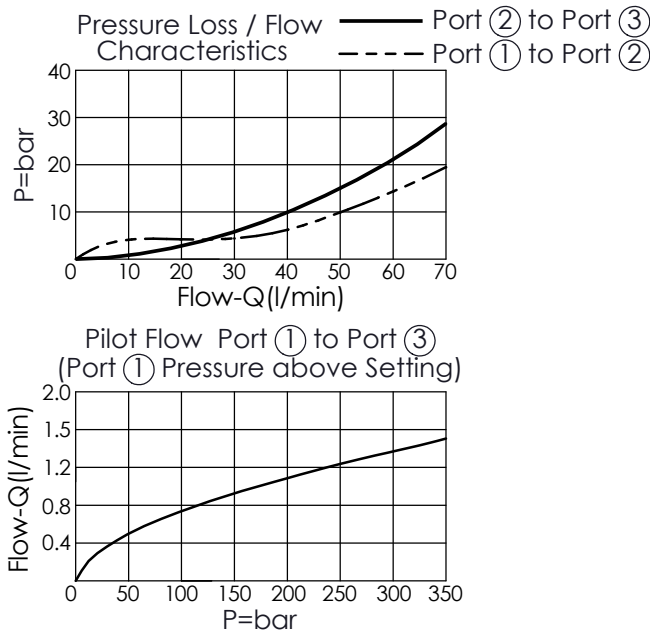

X OPERATION

3Q	Port ② to Port ③; Port ① pilot to shift, Port ① to Port ②
-----------	---

• When the pressure at port ① exceed the setting pressure, there is a control pilot flow (0.16 - 0.25 L/min.)

Y SPRINGS

ADJUSTMENT RANGES

Y	ADJUSTMENT RANGES
A	7 - 210 bar (70 bar Standard Setting)
B	3.5 - 105 bar (70 bar Standard Setting)
C	10.5 - 420 bar (70 bar Standard Setting)
D	1.7 - 55 bar (28 bar Standard Setting)
E	1.7 - 28 bar (14 bar Standard Setting)
H	2.4 - 210 bar (70 bar Standard Setting)
N	4 - 55 bar (28 bar Standard Setting)
W	7 - 315 bar (70 bar Standard Setting)

Z OPTIONS

L	Leakproof hex. socket screw.	
K	Handknob with Lock Knob. (Order Code: 6ZAK001)	
C	Stainless Steel Tamper Resistant Cover.	