

#### TECHNICAL DATA

Max. Operating pressure: 350 bar



Rated flow: 60 l/min

Cavity-Tooling: 22A-4

Installation torque: 60 - 70 Nm

Weight Approximately: 0.34 (Z=L) kg

- Maximum pressure at port ③ recommend be limited to 210 bar, any technical questions, please feel free to consult with our sales dept.
- Pressure at port ④ is directly additive to the setting of the valve.

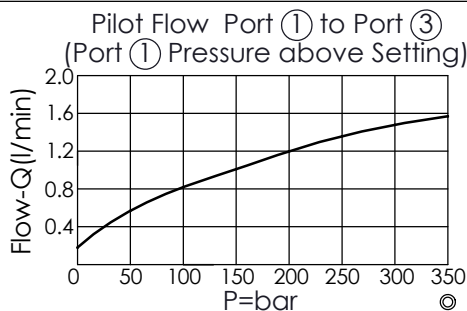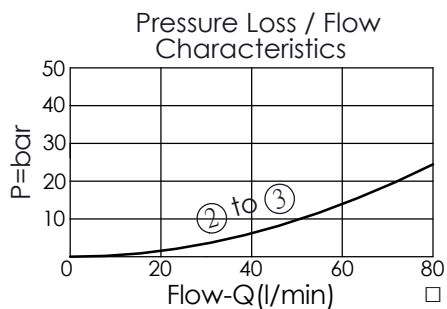

#### X OPERATION

**4M** Normally open, Port ② to Port ③; Port ① pilot to shift, three ports closed

- When the pressure at port ① exceed the setting pressure, there is a control pilot flow (0.16 - 0.25 L/min.)
- Maximum Leakage Approximately (15 cc/min./70 bar)

#### Z OPTIONS

<b>L</b>	Leakproof hex. socket screw.	
<b>K</b>	Handknob with Lock Knob. (Order Code: 6ZAK001)	
<b>C</b>	Stainless Steel Tamper Resistant Cover.	

Y	SPRINGS	
	ADJUSTMENT RANGES	
<b>A</b>	7 - 210 bar	(70 bar Standard Setting)
<b>B</b>	3.5 - 105 bar	(70 bar Standard Setting)
<b>D</b>	1.7 - 55 bar	(28 bar Standard Setting)
<b>E</b>	1.7 - 28 bar	(14 bar Standard Setting)
<b>W</b>	10.5 - 315 bar	(70 bar Standard Setting)