

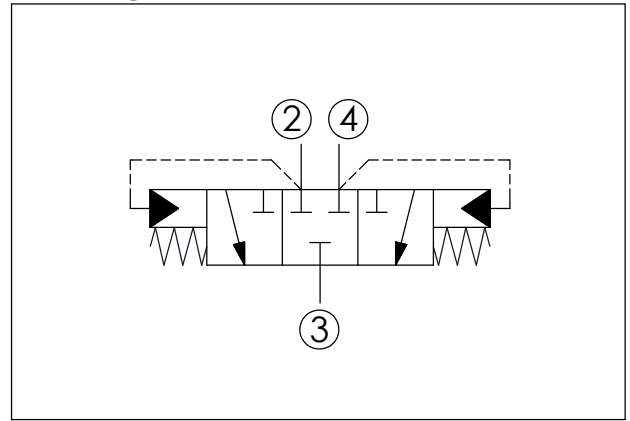


SHUTTLE VALVE (High Side, 3-Position, Shuttle Valve)

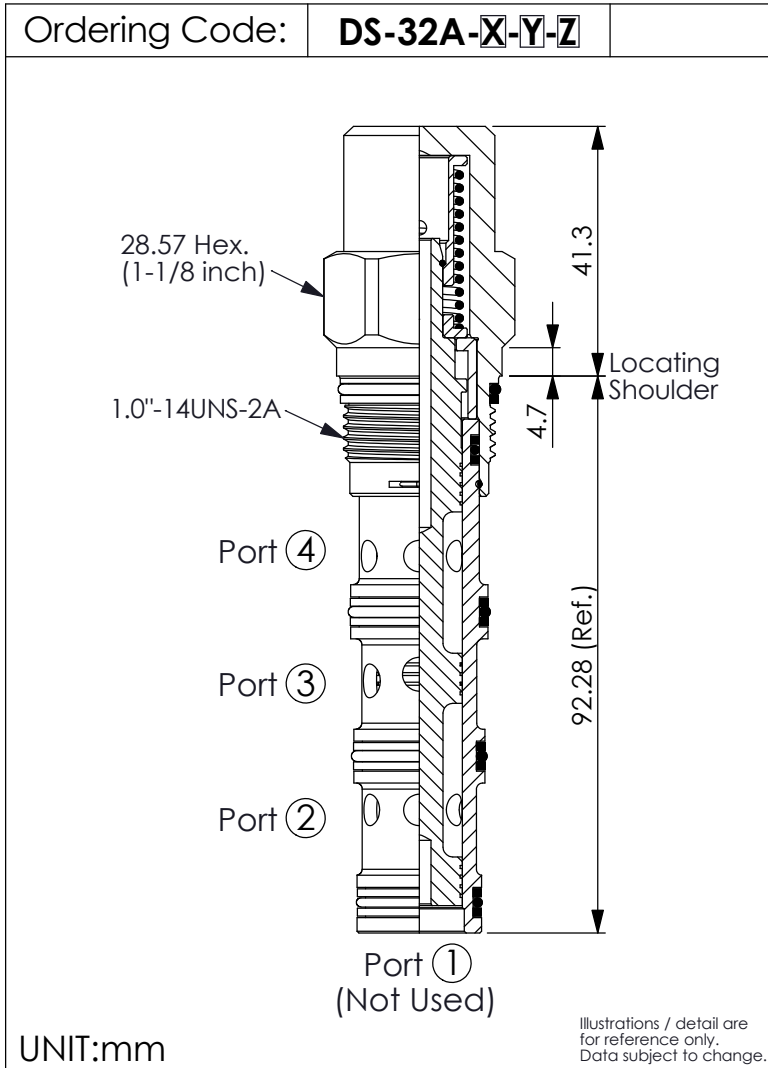

TECHNICAL DATA

Max.Operating pressure:	350	bar
Rated flow:	120	l/min
Cavity-Tooling:	32A-4	
Installation torque:	60 - 70	Nm
Weight:	0.324	kg

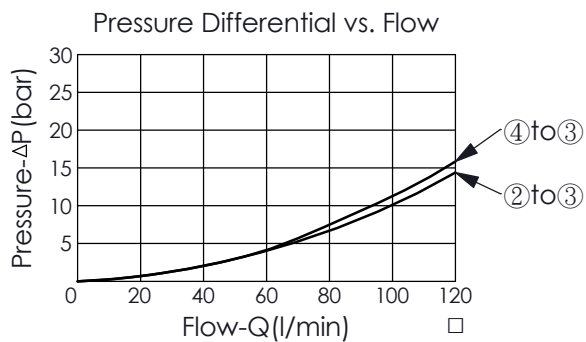

X OPERATION

4H 4 Port (Port ① Not Used), High Side

• Maximum Leakage Approximately (50 cc/min./70 bar)

Y

SPRING

Shifting Pressure

20	2.0 bar	
50	5.0 bar	
70	7.0 bar	
105	10.5 bar	

Z

OPTION

N

Non-adjustable