
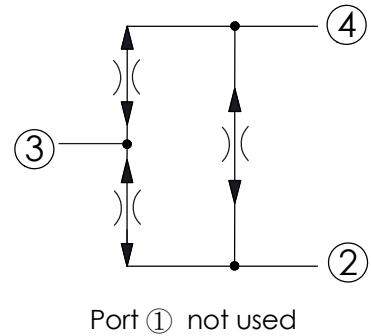


Ordering Code: **FD-32A-X-Y-Z**

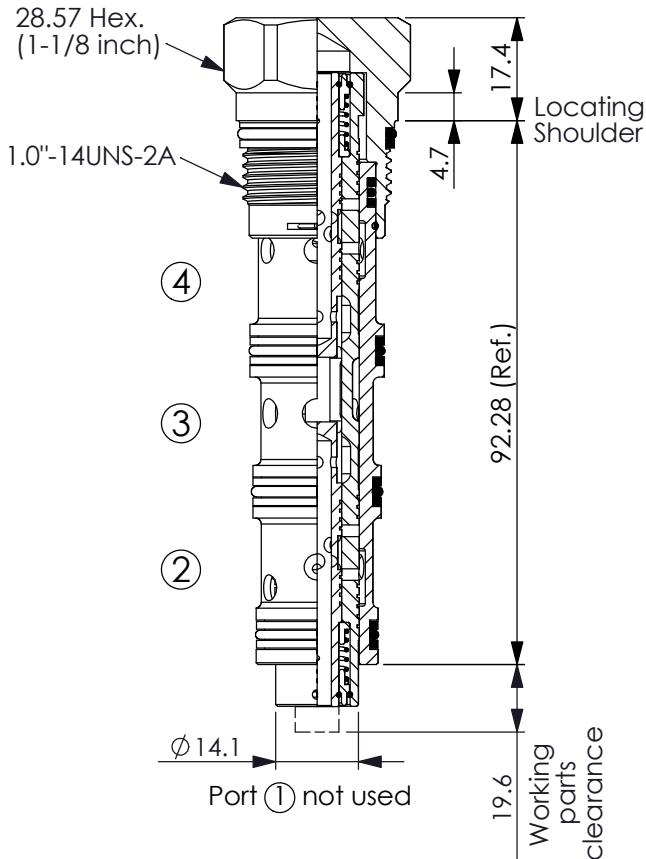

TECHNICAL DATA

Max. Operating pressure: 350 bar

Divisional accuracy at rated maximum inlet flow = $50\% \pm 2.5\%$

Divisional accuracy at rated minimum inlet flow = $50\% \pm 4.5\%$

Cavity-Tooling: 32A-4

Installation torque: 60 - 70 Nm

Weight: 0.27 kg


UNIT:mm

Illustrations / detail are for reference only. Data subject to change.

Capacity:12-60 LPM

Split	Inlet Flow		Rated Accuracy	Maximum Possible Flow Variation
	Max Rated	Min Rated		
50:50	60 L/min	12 L/min	$\pm 2.5\%$	28.5 - 31.5 L/min
			$\pm 4.5\%$	5.5 - 6.5 L/min
Tolerance of Synchronizing Flow				1.1 - 2.8 L/min

The maximum possible variation is at 350 bar differential between legs with high pressure leg being the higher flow in dividing mode and the lower flow in combining mode

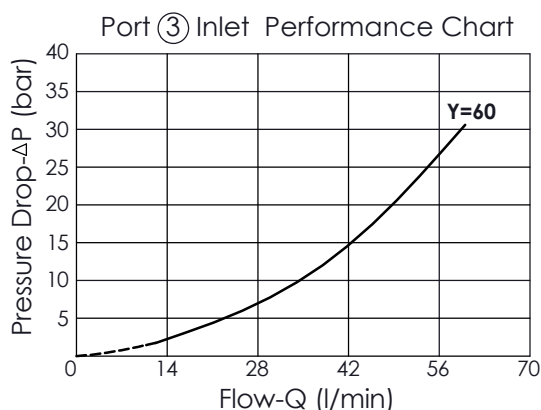

X OPERATION

42 4 Ports;
Flow Divider/Combiner
(Anti-Stall Features)
(This type will keep a flow to both combining ports ② and ④ when port ② or ④ is "free-wheeling." This function keeps parallel hydraulic-motor drive circuits from stalling in the combining mode.)

Y NOMINAL CAPACITY

60 12 - 60 LPM

Z OPTIONS

N Non-adjustable

