



Ordering Code: **FD-33A-X-Y-Z**

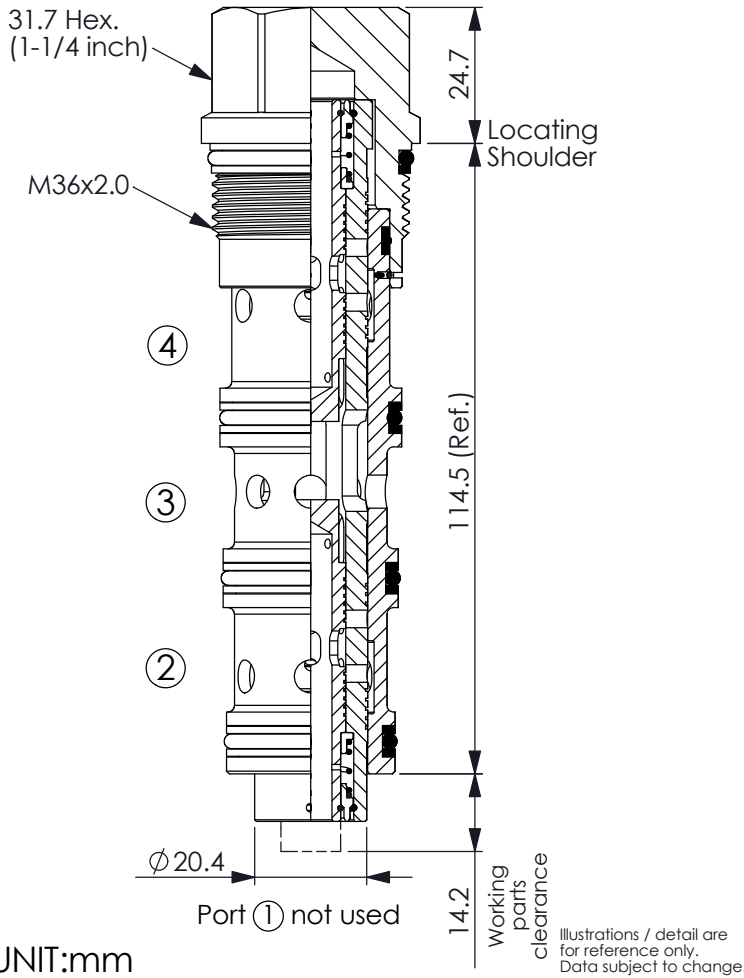

UNIT:mm

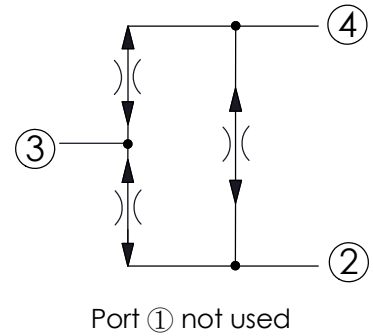

TECHNICAL DATA

Max. Operating pressure: 350 bar

Divisional accuracy at rated maximum inlet flow = $50\% \pm 2.0\%$

Divisional accuracy at rated minimum inlet flow = $50\% \pm 3.0\%$

Cavity-Tooling: 33A-4


Installation torque: 200 - 215 Nm

Weight: 0.65 kg

Capacity:12-60 LPM

Split	Inlet Flow		Rated Accuracy	Maximum Possible Flow Variation
	Max Rated	60 L/min		
50:50	Max Rated	60 L/min	$\pm 2.0\%$	28.8 - 31.2 L/min
	Min Rated	12 L/min	$\pm 3.0\%$	5.6 - 6.4 L/min
Tolerance of Synchronizing Flow				3.4 - 6.6 L/min

The maximum possible variation is at 350 bar differential between legs with high pressure leg being the higher flow in dividing mode and the lower flow in combining mode

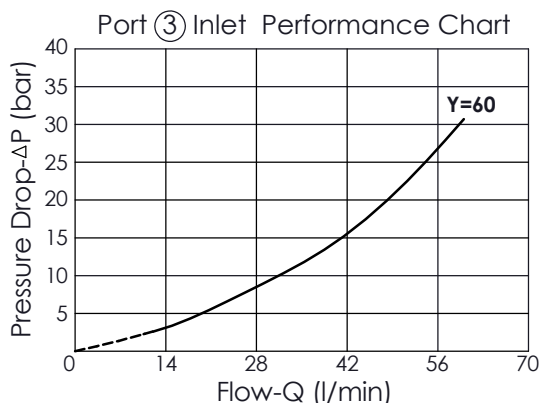

X OPERATION

42 4 Ports;
Flow Divider/Combiner
(Anti-Stall Features)
(This type will keep a flow to both combining ports ② and ④ when port ② or ④ is "free-wheeling." This function keeps parallel hydraulic-motor drive circuits from stalling in the combining mode.)

Y NOMINAL CAPACITY

60 12 - 60 LPM

Z OPTIONS

A Synchronizing High Accuracy

