
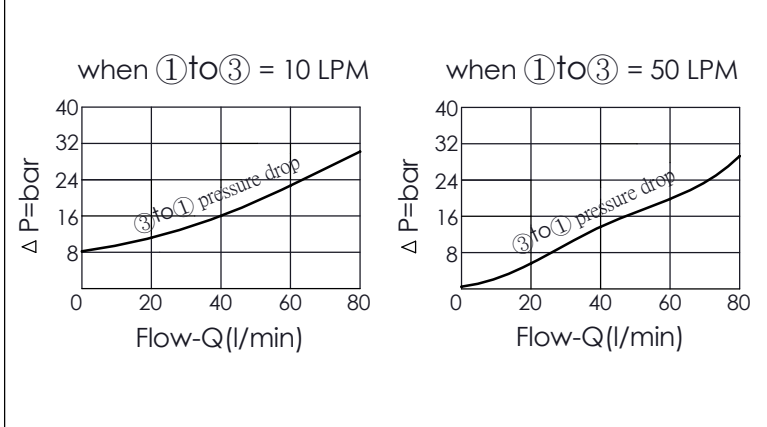


TECHNICAL DATA	
Max. Operating pressure:	240 bar
Inlet flow at port ①:	76 LPM nominal 114 LPM max.
Cavity-Tooling:	12W-3
Installation torque:	45 - 55 Nm
Weight:	0.26 kg
Note: It can be used as a priority-type flow regulator or a restrictive-type 2-way flow regulator when the bypass port (port ②) is blocked.	

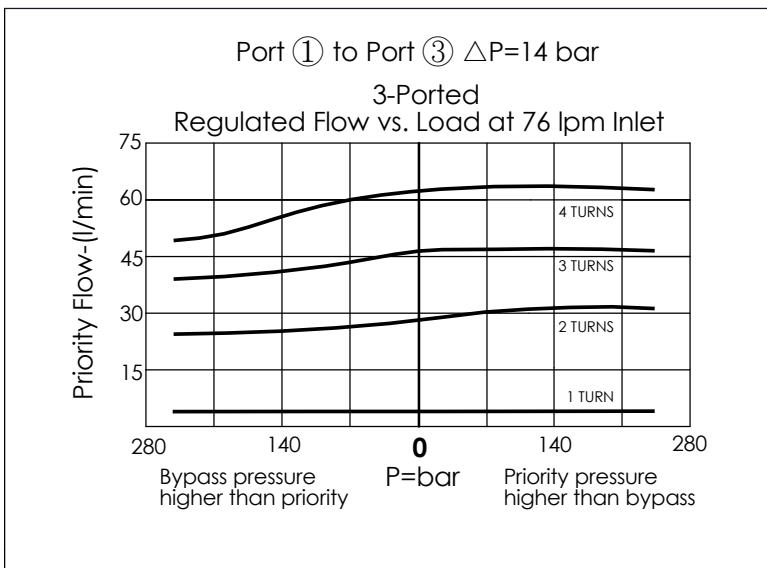

X	PRIORITY FLOW RANGE	
36	Flow Rate :	
	3-ported regulated flow	68 LPM
	2-ported regulated flow	45 LPM

Y	SPRING RANGE	
N	Standard, $\Delta P=14$ bar	
	(Priority Flow 1 - 68 LPM fully adjustable)	

Z	OPTIONS	
L	Leakproof hex. socket screw.	
LP	Leakproof hex. socket screw. With stainless steel external metal components	
K	Handknob with Lock Knob. (Order Code: 6ZAK001)	
T	Three-winged Handknob Kit.	