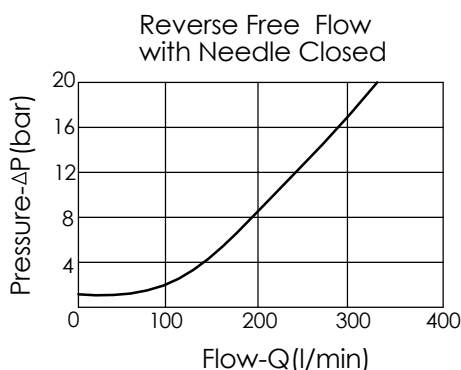
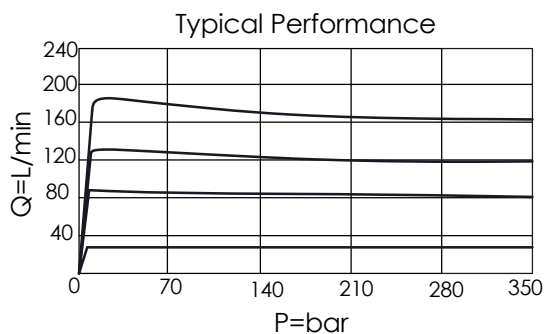


TECHNICAL DATA



Max. Operating pressure:	350 bar
Rated flow:	200 l/min
Cavity-Tooling:	18A-2 (18AB-2)
Installation torque:	465 - 500 Nm
Weight:	1.22 kg

Accurate pressure compensated control requires that a 200 psi (14 bar) minimum pressure differential be maintained across the valve.



X	OPERATION
20	Standard Type

Y	FLOW SETTING
A	1.0 - 200 LPM

Z	OPTIONS
L	Leakproof hex. socket screw. 
K	Handknob with Lock Knob. (Order Code: 6ZAK001) 
T	Three-winged Handknob Kit. 