


TECHNICAL DATA

Max. Operating pressure:	350 bar
Rated flow:	0.8 - 95 l/min
Cavity-Tooling:	16A-2
Installation torque:	200 - 215 Nm
Weight:	0.515 (Z=L) kg

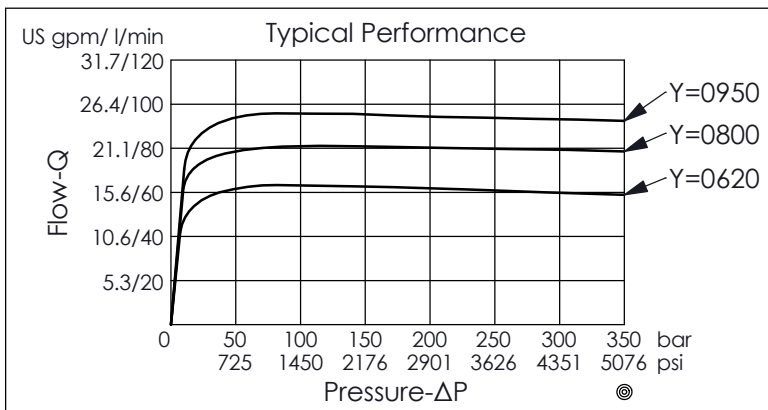

X	OPERATION
2C	Fixed Setting, with Reverse Flow Check

Y	FLOW SETTING
0620	62.0 LPM
0800	80.0 LPM
0950	95.0 LPM

- Factory set flow ratings are within $\pm 10\%$ of the requested setting
- Customer must specify a flow rating
- If you need specific flow accuracy, please contact WINNER's sales department

Z	OPTIONS
L	Leakproof hex. socket screw. (Adjustment Ranges Approx. $\pm 22\%$)
K	Handknob with Lock Knob. (Order Code: 6ZAK001)