


TECHNICAL DATA

Max. Operating pressure:	350 bar
Rated flow:	480 l/min
Cavity-Tooling:	24A-4 (24AB-4)
Installation torque:	465 - 500 Nm
Weight:	1.672 (Z=L) kg

X	OPERATION	
4P	Pressure adjustable	
	<ul style="list-style-type: none"> Maximum Leakage Approximately (0.7 cc/min./350 bar) (Leakage rate between port ① and port ② is very low) All ports will accept 350 bar. When pilot pressure falls to setting approx. 85% of cracking value, the valve will return to the spring biased closed position. 	

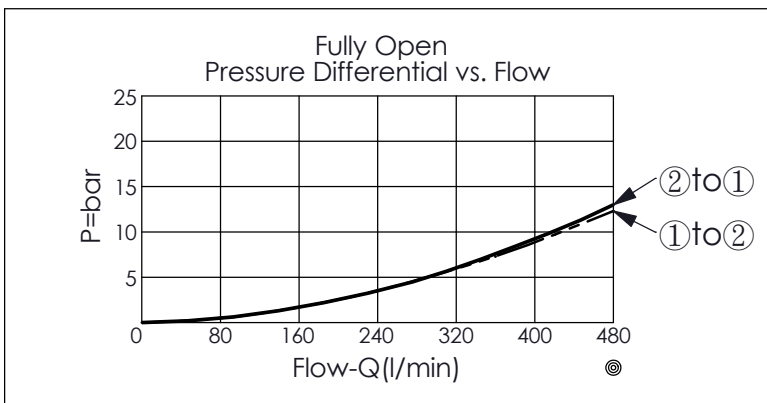

Y	SHIFT PRESSURE ADJUSTMENT RANGE	
	Recommendation of Minimum Pilot Pressure Required to Shift Valve: 20 bar (Port ③)	
A	14 - 210 bar (70 bar Standard Setting)	
B	14 - 105 bar (70 bar Standard Setting)	
D	14 - 55 bar (28 bar Standard Setting)	
W	14 - 315 bar (70 bar Standard Setting)	

Z	OPTIONS	
L	Leakproof hex. socket screw.	
C	Stainless Steel Tamper Resistant Cover.	
K	Handknob with Lock Knob. (Order Code: 6ZAK001)	
	<ul style="list-style-type: none"> If special seal is required, please contact Winner sales department. 	