


TECHNICAL DATA	
Max. Operating pressure:	350 bar
Rated flow:	240 l/min
Cavity-Tooling:	23A-4
Installation torque:	200 - 215 Nm
Weight:	0.67 kg

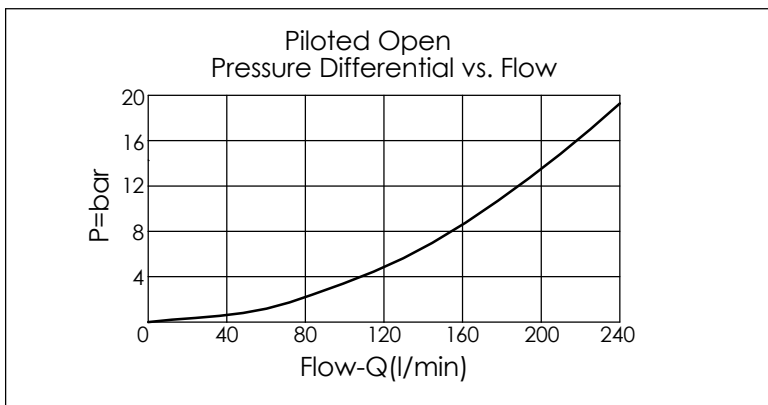

X	OPERATION	
4S	Pilot-to-closed	
<ul style="list-style-type: none"> Maximum Leakage Approximately (0.7 cc/min.) All ports will accept 350 bar. 		

Y	SPRINGS	
	Recommendation of Minimum Pilot Pressure Required to Shift Valve (Port (3))	
20	20.0 bar	
<p>We suggest that using above 20 bar pilot pressure at Port (3) when Port (1) and Port (2) are 350 bar. In order to ensure shifting quickly for every kinds of pressure and flow.</p>		

Z	OPTIONS	
N	Non-adjustable	
NP	Non-adjustable With stainless steel external metal components (Buna-N Seal)	