

TECHNICAL DATA

Max. Operating pressure: 350 bar

Rated flow: 60 l/min

Cavity-Tooling: 21A-4


Installation torque: 40 - 50 Nm

Weight: 0.19 (Z=L) kg


X OPERATION


4P Pressure adjustable

- Maximum Leakage Approximately (0.7 cc/min./350 bar) (Leakage rate between port ① and port ② is very low)
- All ports will accept 350 bar.
- When pilot pressure falls to setting approx. 85% of cracking value, the valve will return to the spring biased open position.

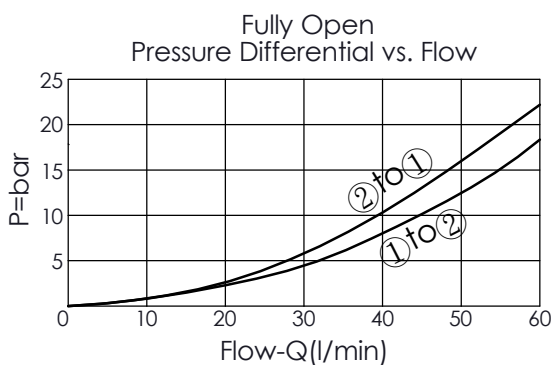

Z OPTIONS

L Leakproof hex. socket screw. 

LP Leakproof hex. socket screw. With stainless steel external metal components 

C Stainless Steel Tamper Resistant Cover. 

CB Plastic Tamper Resistant Cover (Order Code:5JAA093) 

K Handknob with Lock Knob. (Order Code: 6ZAK001) 

Y SHIFT PRESSURE ADJUSTMENT RANGE

Recommendation of Minimum Pilot Pressure Required to Shift Valve :28 bar (Port ③)

A 28 - 210 bar (70 bar Standard Setting)

B 28 - 105 bar (70 bar Standard Setting)

W 28 - 315 bar (70 bar Standard Setting)