


TECHNICAL DATA	
Max. Operating pressure:	350 bar
Rated flow:	480 l/min
Cavity-Tooling:	19A-3 (19AB-3)
Installation torque:	465 - 500 Nm
Weight:	1.19 kg

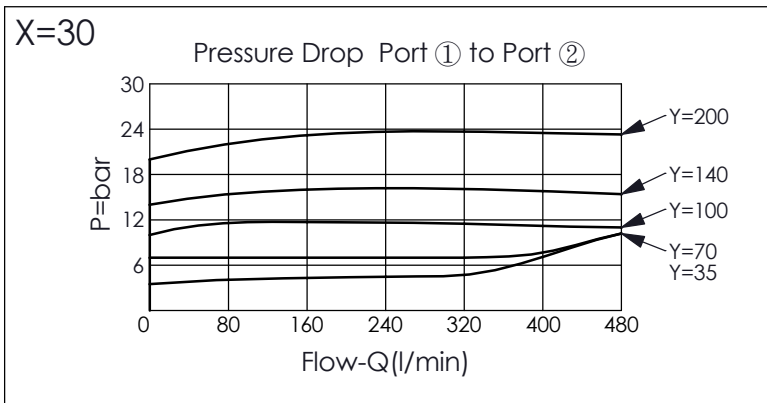

X	OPERATION
30	External Pilot (bypass compensator)
31	Internal Pilot (Port ① to Port ③) (mainstage relief element)

Y	SPRINGS	
	Cracking pressure	
10	1.0 bar (Only X=31)	
35	3.5 bar	
70	7.0 bar	
100	10.0 bar	
140	14.0 bar	
200	20.0 bar	

Z	OPTION
N	Non-adjustable