

Ordering Code: **LS-163A-X-Y-Z**

19.05 Hex. (3/4 inch)

Inlet ③

M16x1.5

Outlet (Signal) ②

Inlet ①


32

30.96 (Ref.)


Locating Shoulder

UNIT:mm

Illustrations / detail are for reference only. Data subject to change.

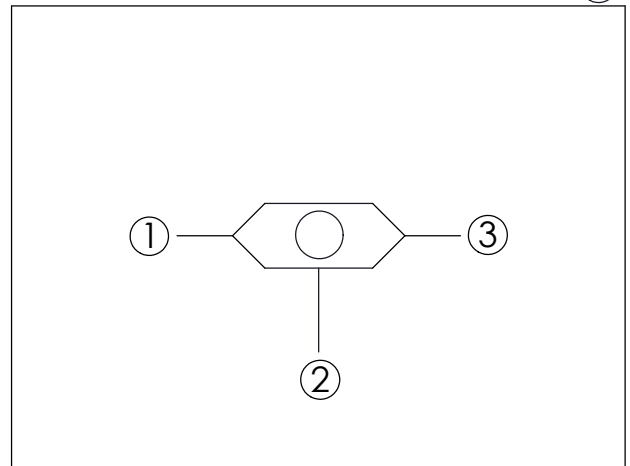

TECHNICAL DATA		
Max. Operating pressure:	350 bar	
Rated flow:	4.7	l/min
Cavity-Tooling:	163A-3	
Installation torque:	27 - 33	Nm
Weight:	0.09	kg

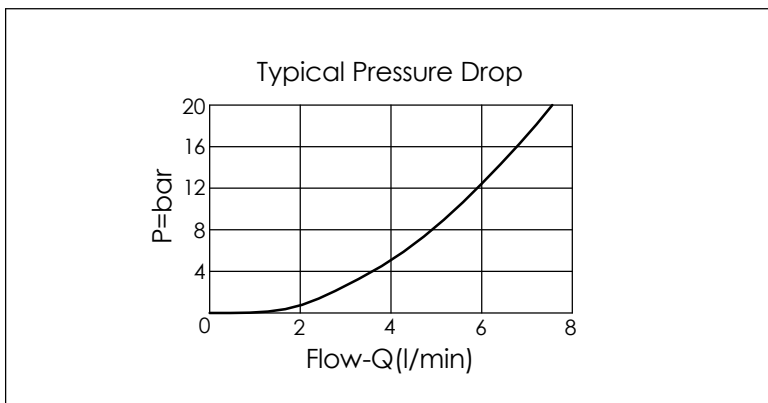

X	OPERATION	
30	Signal at Port ② (Standard)	
· Maximum Leakage Approximately (0.3 cc/min./70 bar)		

Y	SPRING	
N	Non-Spring	

Z	OPTION	
N	Non-adjustable	
NP	Non-adjustable With stainless steel external metal components (Buna-N Seal)	