

Ordering Code: **LS-11A-X-Y-Z**

22.22 Hex. (7/8 inch)

Inlet ③

M20x1.5

Outlet (Signal) ②

Inlet ①


30

Locating Shoulder


35.05 (Ref.)

UNIT:mm

Illustrations / detail are for reference only. Data subject to change.

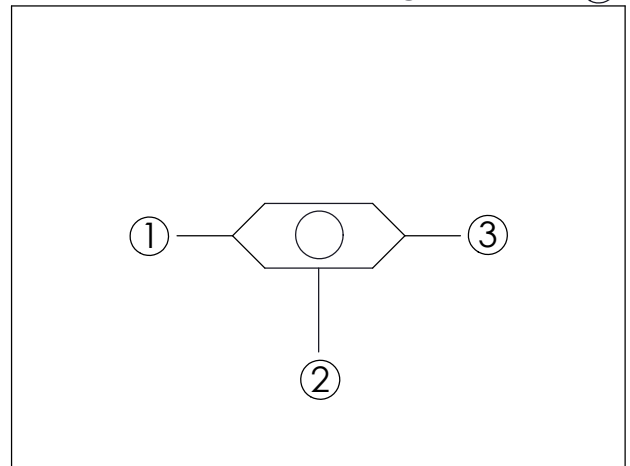

TECHNICAL DATA		
Max. Operating pressure:	350	bar
Rated flow:	10	l/min
Cavity-Tooling:	11A-3	
Installation torque:	40 - 50	Nm
Weight:	0.13	kg

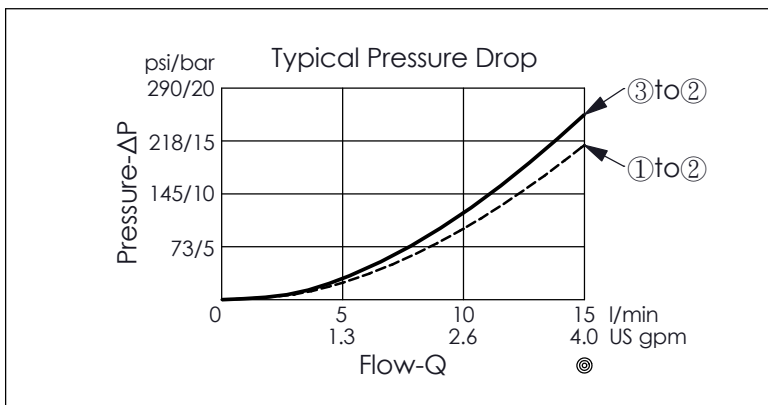

X	OPERATION	
30	Signal at Port ② (Standard)	
· Maximum Leakage Approximately (0.3 cc/min./70 bar)		

Y	SPRING	
N	Non-Spring	

Z	OPTION	
N	Non-adjustable	
NP	Non-adjustable With stainless steel external metal components (Buna-N Seal)	