



Ordering Code: **LS-382A-X-Y-Z**

UNIT:mm

Illustrations / detail are for reference only. Data subject to change.

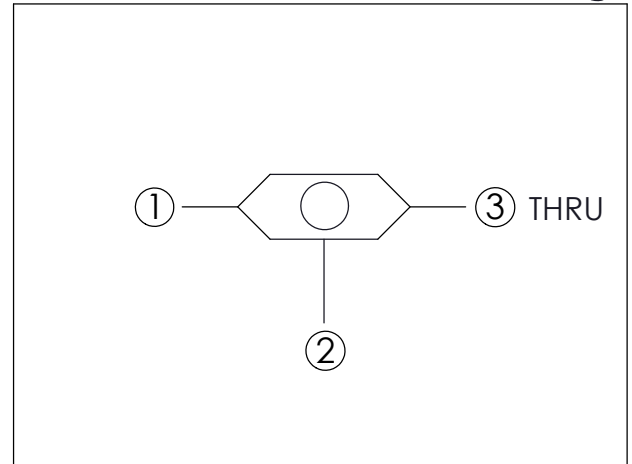

| TECHNICAL DATA | |
|--------------------------|------------|
| Max. Operating pressure: | 350 bar |
| Rated flow: | 4 l/min |
| Cavity-Tooling: | 382A-3 |
| Installation torque: | 11 - 14 Nm |
| Weight: | 0.006 kg |

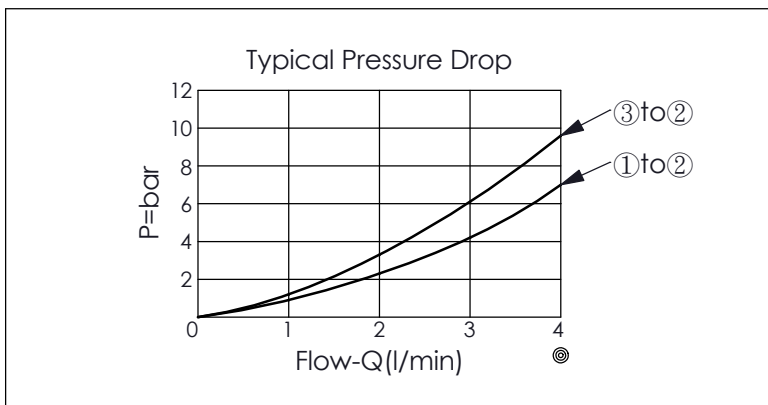

| X | OPERATION |
|--|-----------------------------|
| 30 | Signal at Port ② (Standard) |
| • Maximum Leakage Approximately (0.3 cc/min./70 bar) | |

| Y | SPRING |
|----------|------------|
| N | Non-Spring |

| Z | OPTION |
|------------|------------------------------|
| N | Non-adjustable (Buna-N Seal) |
| N-V | Non-adjustable (VITON Seal) |