

Ordering Code: **LS-13A-X-Y-Z**

22.22 Hex. (7/8 inch)

External Port

19

Locating Shoulder

5.6

M20x1.5


Outlet (Signal) ②

35.05 (Ref.)


Inlet ①

UNIT:mm

Illustrations / detail are for reference only. Data subject to change.

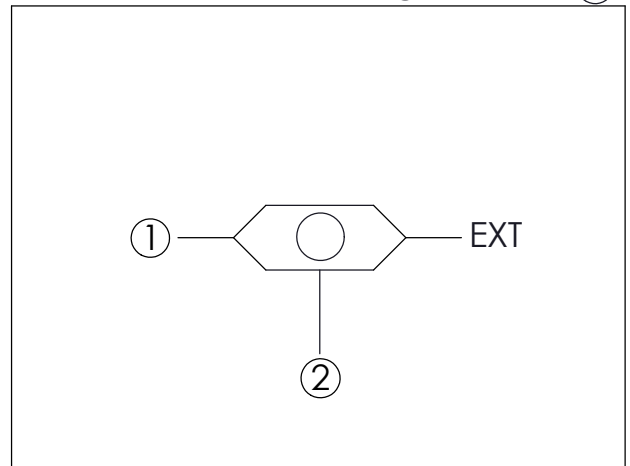

TECHNICAL DATA		
Max. Operating pressure:	350	bar
Rated flow:	10	l/min
Cavity-Tooling:	13A-2	
Installation torque:	40 - 50	Nm
Weight:	0.11	kg

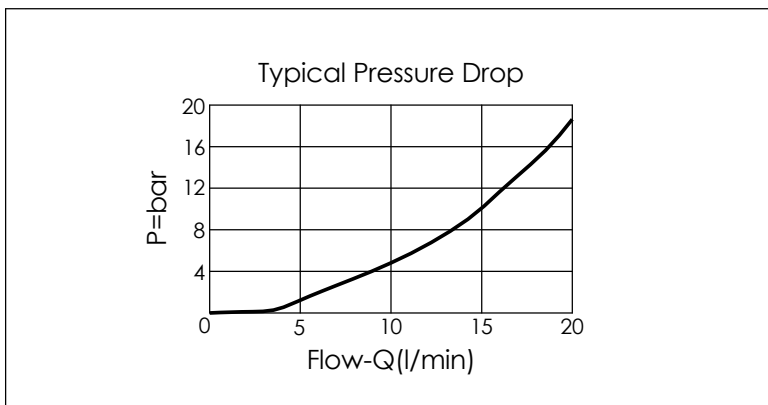

X	OPERATION	
22	Signal at Port ② (Standard)	
<ul style="list-style-type: none"> Maximum Leakage Approximately (0.3 cc/min./70 bar) 		

Y	SPRING	
N	Non-Spring	

Z	OPTION	
G02	External G1/4" Port	
S04	External SAE-4 Port (7/16"-20UNF-2B)	