

TECHNICAL DATA

Max. operating pressure: 350 bar
(Refer To Performance Chart)

Rated flow: 25 l/min
(Refer To Performance Chart)


Cavity-Tooling: 13A-2

Installation torque: 40-50 Nm


Weight: 0.14 (Z=L) kg

Performance Chart

When the valve is fully open, port ① to port ②

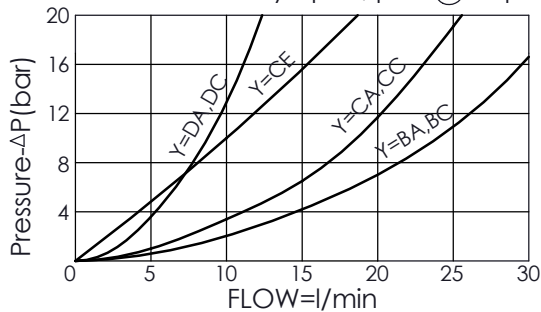


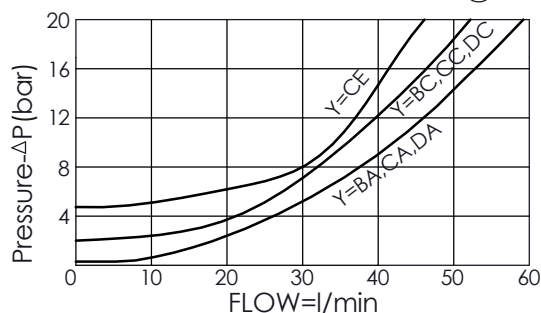


When the valve is fully closed, port ② to port ①



| Y | OPTIONS | |
|----|---------------------------------------------------------|-------------------|
| | Maximum Nominal Orifice (Refer To Performance Chart) | Cracking Pressure |
| BA | Ø 4.8 mm | 0.3 bar |
| BC | Ø 4.8 mm | 2.0 bar |
| CA | Ø 2.3 mm | 0.3 bar |
| CC | Ø 2.3 mm | 2.0 bar |
| CE | Ø 2.3 mm | 5.0 bar |
| DA | Ø 1.5 mm | 0.3 bar |
| DC | Ø 1.5 mm | 2.0 bar |

| X | OPERATION |
|----|--------------------|
| 21 | ② to ① (Free Flow) |

| Z | OPTIONS |
|----|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| L | Leakproof hex. socket screw.  |
| LP | Leakproof hex. socket screw. With stainless steel external metal components  |
| K | Handknob with Lock Knob. (Order Code: 6ZAK001)  |
| T | Three-winged Handknob Kit.  |