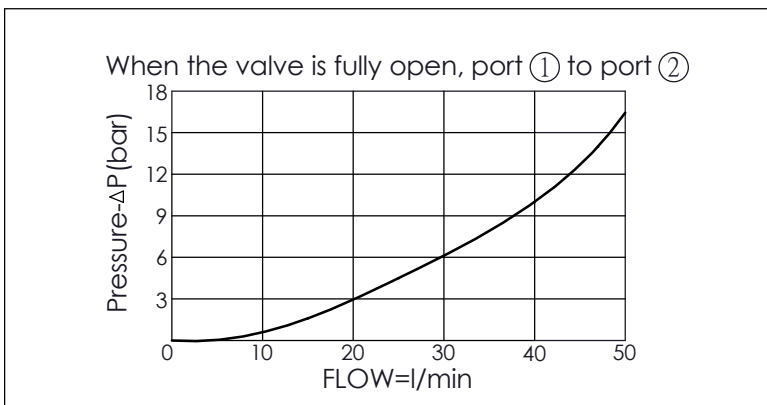






TECHNICAL DATA	
Max. operating pressure:	350 bar (Refer To Performance Chart)
Rated flow:	50 l/min (Refer To Performance Chart)
Cavity-Tooling:	5A-2
Installation torque:	60 - 70 Nm
Weight:	0.27 (Z=L) kg



X	OPERATION
21	② to ① (Free Flow)

Z	OPTIONS
L	Leakproof hex. socket screw. 
LP	Leakproof hex. socket screw. With stainless steel external metal components 
K	Handknob with Lock Knob. (Order Code: 6ZAK001) 
T	Three-winged Handknob Kit. 

Y	OPTIONS	
	Maximum Nominal Orifice (Refer To Performance Chart)	Cracking Pressure
BA	Ø 6.3 mm	0.3 bar
BC	Ø 6.3 mm	2.0 bar
CA	Ø 3.3 mm	0.3 bar
CC	Ø 3.3 mm	2.0 bar