

### TECHNICAL DATA

Max. operating pressure: 350 bar  
(Refer To Performance Chart)


Rated flow: 120 l/min  
(Refer To Performance Chart)

Cavity-Tooling: 16A-2

Installation torque: 200 - 215 Nm

Weight: 0.55 (Z=L) kg

When the valve is fully open, port ① to port ②

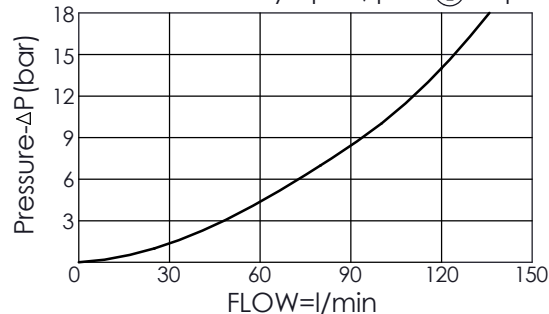

### X OPERATION

21 ② to ① (Free Flow)

### Z OPTIONS

L Leakproof hex. socket screw.

LP Leakproof hex. socket screw. With stainless steel external metal components

K Handknob with Lock Knob. (Order Code: 6ZAK001)

T Three-winged Handknob Kit.

Y	OPTIONS	
	Maximum Nominal Orifice (Refer To Performance Chart)	Cracking Pressure
BA	ϕ9.7 mm	0.3 bar
BC	ϕ9.7 mm	2.0 bar
CA	ϕ7.1 mm	0.3 bar
CC	ϕ7.1 mm	2.0 bar