

TECHNICAL DATA

Max. operating pressure: 350 bar
(Refer To Performance Chart)


Rated flow: 210 l/min
(Refer To Performance Chart)

Cavity-Tooling: 18A-2 (18AB-2)

Installation torque: 465 - 500 Nm

Weight: 1.22 (Z=L) kg


When the valve is fully open, port ① to port ②

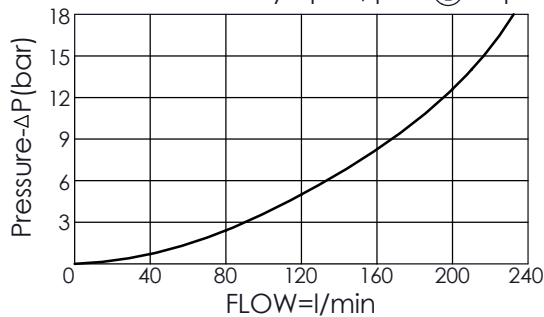


X OPERATION

21 ② to ① (Free Flow)

Z OPTIONS

L Leakproof hex. socket screw. 

LP Leakproof hex. socket screw. With stainless steel external metal components 

K Handknob with Lock Knob. (Order Code: 6ZAK001) 

T Three-winged Handknob Kit. 

Y	OPTIONS	
	Maximum Nominal Orifice (Refer To Performance Chart)	Cracking Pressure
BA	ϕ 14.2 mm	0.3 bar
BC	ϕ 14.2 mm	2.0 bar
CA	ϕ 9.7 mm	0.3 bar
CC	ϕ 9.7 mm	2.0 bar