

FLOW CONTROL VALVE (Fully Adjustable Needle, Pilot Capacity)

Ordering Code: **NF-8A-X-Y-Z**

22.22 Hex. (7/8 inch)

M16x1.5

24.3


19.05 (Ref.)

Locating Shoulder


①

②

UNIT:mm

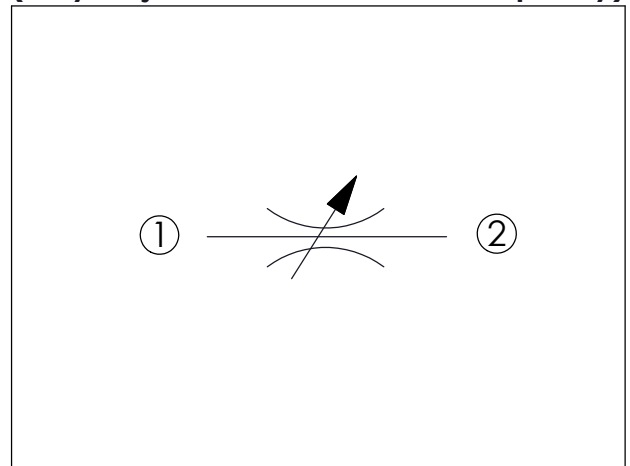

TECHNICAL DATA		
Max. operating pressure:	350	bar (Refer To Performance Chart)
Rated flow:	0.8	l/min (Refer To Performance Chart)
Cavity-Tooling:	8A-2	
Installation torque:	27-33	Nm
Weight:	0.06	kg

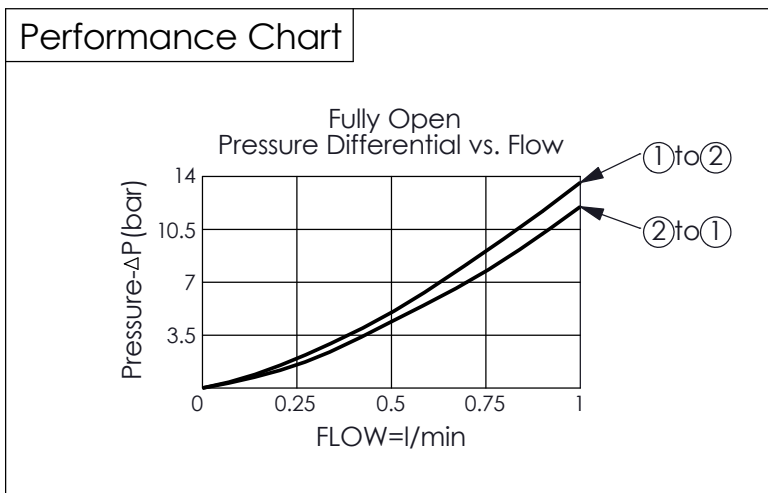

X	OPERATION	
20	Needle Valve (Standard Type)	

Y	MAXIMUM NOMINAL ORIFICE DIAMETER	
08	ϕ 0.8 mm	

Z	OPTIONS	
K	Handknob with Lock Knob.	