


TECHNICAL DATA	
Max. operating pressure:	350 bar (Refer To Performance Chart)
Rated Flow:	36 l/min (Refer To Performance Chart)
Cavity-Tooling:	08W-2
Installation torque:	25-35 Nm
Weight:	0.13 (Z=L) kg

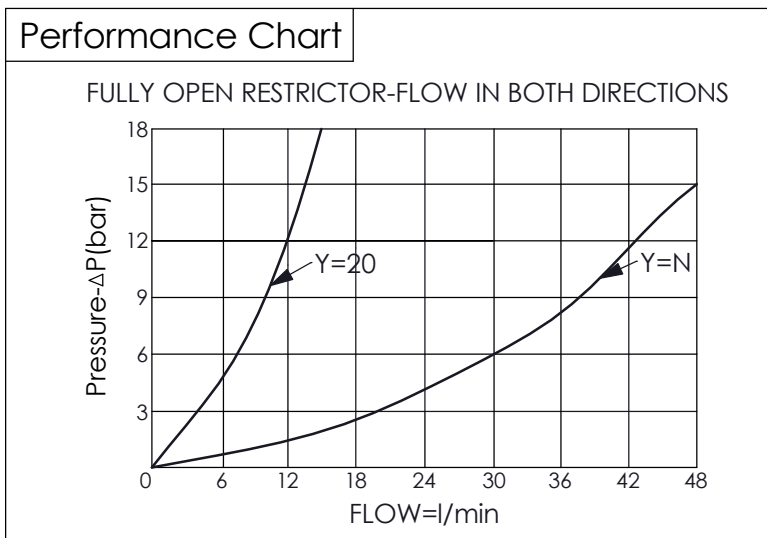

Y	MAXIMUM NOMINAL ORIFICE	
N	Ø 5.6 mm	
20	Ø 2.0 mm	

X	OPERATION	
20	Needle Valve	

Z	OPTIONS	
L	Leakproof hex. socket screw.	
K	Handknob with Lock Knob. (Order Code: 6ZAK001)	
E	Handknob and locknut.	
B	Handknob and aluminum locknut.	
T	Three-winged Handknob Kit.	