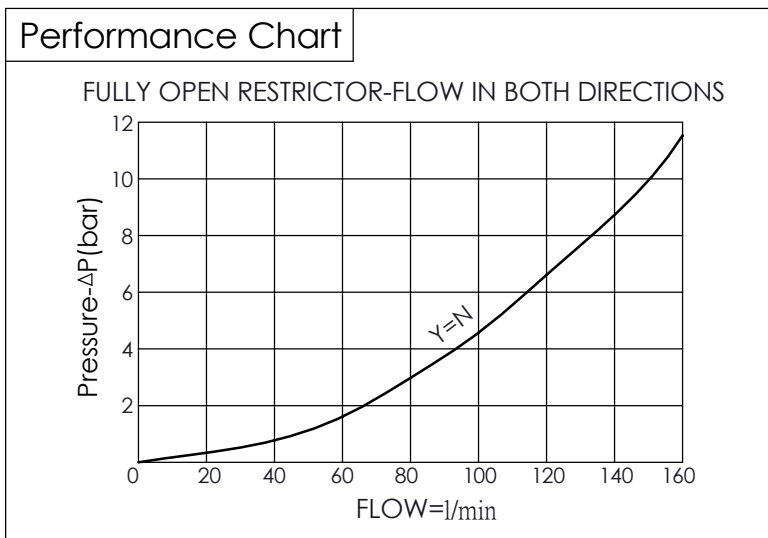





TECHNICAL DATA	
Max. operating pressure:	350 bar (Refer To Performance Chart)
Rated flow:	126 l/min (Refer To Performance Chart)
Cavity-Tooling:	12W-2
Installation torque:	45-55 Nm
Weight:	0.21 (Z=L) kg



Y	MAXIMUM NOMINAL ORIFICE DIAMETER
N	Ø 10.6 mm

X	OPERATION
20	Needle Valve

Z	OPTIONS
L	Leakproof hex. socket screw. 
K	Handknob with Lock Knob. (Order Code: 6ZAK001) 
E	Handknob and locknut. 
B	Handknob and aluminum locknut. 