
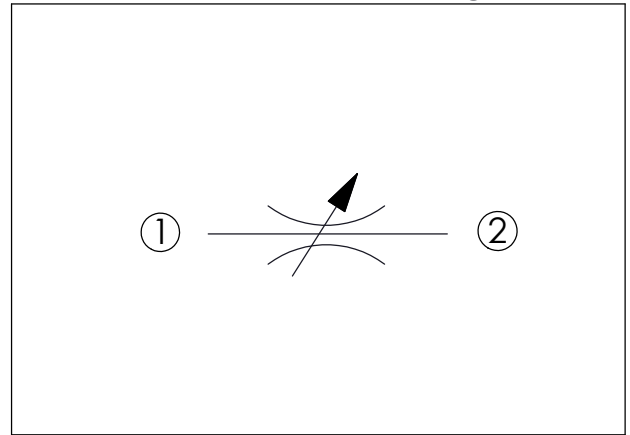





Y	MAXIMUM NOMINAL ORIFICE
67	Ø 6.7 mm



TECHNICAL DATA	
Max. operating pressure:	350 bar (Refer To Performance Chart)
Rated Flow:	50 l/min (Refer To Performance Chart)
Cavity-Tooling:	10W-2
Installation torque:	35-45 Nm
Weight:	0.15 (Z=L) kg

X	OPERATION
20	Fully Adjustable Needle with Sharp-Edge Orifice

Z	OPTIONS
L	Leakproof hex. socket screw. 
K	Handknob with Lock Knob. (Order Code: 6ZAK001) 
E	Handknob and locknut. 
B	Handknob and aluminum locknut. 
T	Three-winged Handknob Kit. 