




FLOW CONTROL VALVE (Fully Adjustable Needle with Sharp-Edge Orifice)

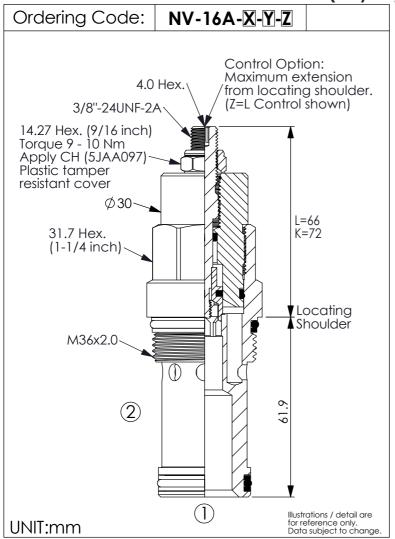



TECHNIC	CAL DATA	
Max. operating p		
(Reter To	o Performance	Chart)
Rated Flow:	100	I/min
(Refer To	o Performance	Chart)
Cavity-Tooling:	16A-2	
Installation torque	e: 200 - 215	Nm
Weight:	0.526 ( <b>Z</b> =L)	kg

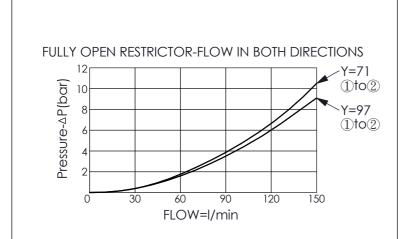

Fully Adjustable Needle with Sharp-Edge Orifice	
	Fully Adjustable Needle with Sharp-Edge Orifice

	MAXIMUM NOMINAL ORIFICE DIAMETER	
97	Ø 9.7 mm	
71	Ø 7.1 mm	

Z	OPTIONS
L	Leakproof hex. socket screw.
K	Handknob with Lock Knob. (Order Code: 6ZAK001)
T	Three-winged Handknob Kit.

Rev.230926 B.302.103.E