





TECHNICAL DATA	
Max. operating pressure:	350 bar (Refer To Performance Chart)
Rated flow:	170 l/min (Refer To Performance Chart)
Cavity-Tooling:	5A-2
Installation torque:	60 - 70 Nm
Weight:	0.27 (Z=L) kg

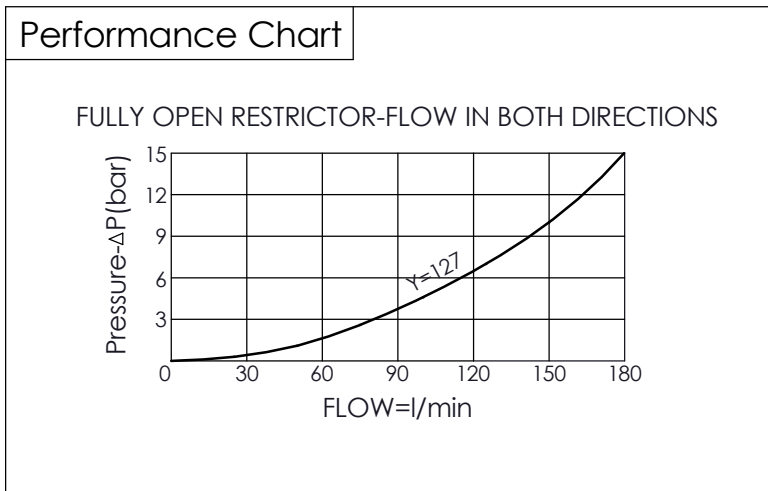

X	OPERATION
28	Fully Adjustable Needle Valve

Y	MAXIMUM NOMINAL ORIFICE DIAMETER
127	Ø 12.7 mm

Z	OPTIONS
L	Leakproof hex. socket screw. 
LP	Leakproof hex. socket screw. With stainless steel external metal components 
K	Handknob with Lock Knob. (Order Code: 6ZAK001) 
T	Three-winged Handknob Kit. 