


TECHNICAL DATA	
Max. operating pressure:	350 bar (Refer To Performance Chart)
Rated flow:	340 l/min (Refer To Performance Chart)
Cavity-Tooling:	16A-2
Installation torque:	200 - 215 Nm
Weight:	0.55 (Z=L) kg

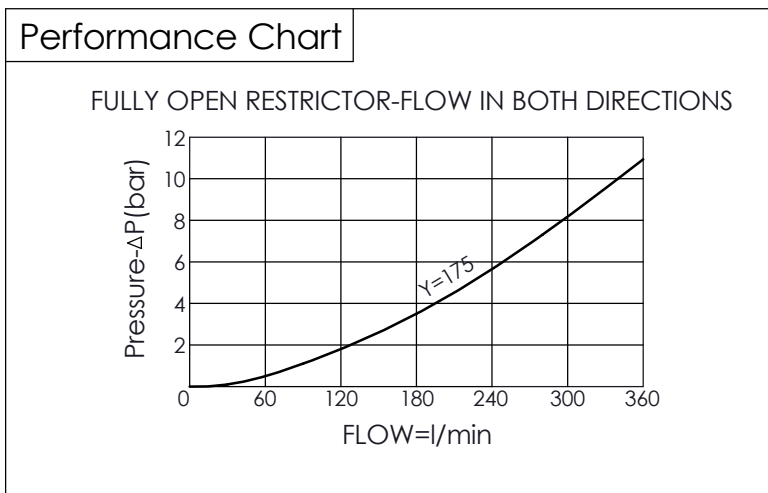

X	OPERATION
28	Fully Adjustable Needle Valve

Y	MAXIMUM NOMINAL ORIFICE DIAMETER
175	Ø 17.5 mm

Z	OPTIONS
L	Leakproof hex. socket screw.
LP	Leakproof hex. socket screw. With stainless steel external metal components
K	Handknob with Lock Knob. (Order Code: 6ZAK001)
T	Three-winged Handknob Kit.