


TECHNICAL DATA	
Max.Operating pressure:	350 bar
Rated flow:	40 l/min
Cavity-Tooling:	11A-3
Installation torque:	40-50 Nm
Weight:	0.16 (Z=L,LF,LP) kg 0.18 (Z=KF) kg 0.14 (Z=G) kg
Control Pilot Flow (0.11-0.16 L/min.)	

X	OPERATION	
30	Standard Type	
35	Impact Resistant Type (Without Filter)	

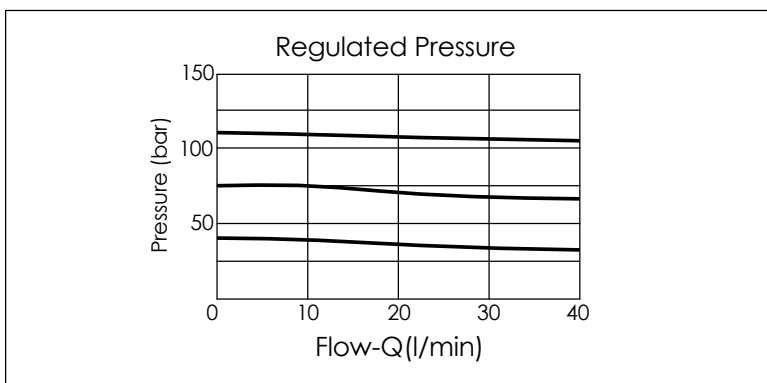

Z	OPTIONS	
L	Leakproof hex. socket screw.	
LF	Leakproof hex. socket screw. with Panel Mount.	
LP	Leakproof hex. socket screw. With stainless steel external metal components	
K	Handknob with Lock Knob. (Order Code: 6ZAK001)	
KF	Handknob with Panel Mount.	
G	Wrench Adjustment	

Y	SPRINGS	
ADJUSTMENT RANGES		
A	7-210 bar (14 bar Standard Setting)	Maximum Differential=210 bar
B	3.5-105 bar (14 bar Standard Setting)	Maximum Differential=210 bar
C	10.5-420 bar (14 bar Standard Setting)	
D	1.7-55 bar (14 bar Standard Setting)	Maximum Differential=140 bar
E	1.7-28 bar (14 bar Standard Setting)	Maximum Differential=140 bar
*G	4-210 bar (14 bar Standard Setting)	
*K	5-105 bar (14 bar Standard Setting)	
N	4-55 bar (14 bar Standard Setting)	Maximum Differential=140 bar
*P	2.8-28 bar (14 bar Standard Setting)	
Q	4-28 bar (14 bar Standard Setting)	Maximum Differential=140 bar
W	10.5-315 bar (14 bar Standard Setting)	

* Maximum differential pressure...Any technical questions, please feel free to consult with our sales dept.