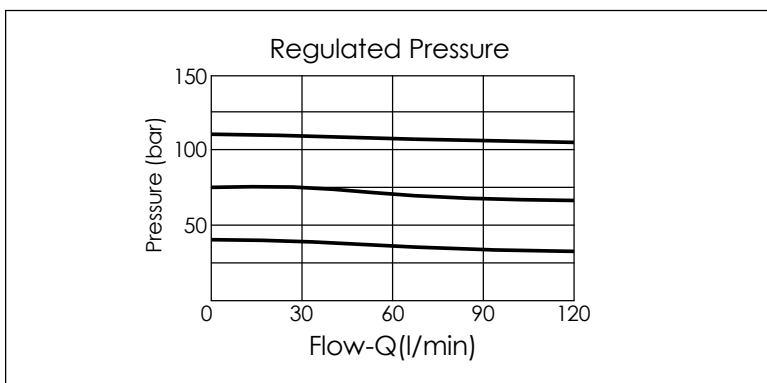







TECHNICAL DATA	
Max.Operating pressure:	350 bar
Rated flow:	80 l/min
Cavity-Tooling:	2A-3
Installation torque:	60-70 Nm
Weight:	0.29 (Z=L,LP) 0.30 (Z=KF) kg
Control Pilot Flow (0.16-0.25 L/min.)	

X	OPERATION
30	Standard Type
35	Impact Resistant Type (Without Filter)



Z	OPTIONS
L	Leakproof hex. socket screw. 
LP	Leakproof hex. socket screw. With stainless steel external metal components 
K	Handknob with Lock Knob. (Order Code: 6ZAK001) 
KF	Handknob with Panel Mount. 
BA	Handknob and aluminum locknut. 

Y	SPRINGS
ADJUSTMENT RANGES	
A	7-210 bar (14 bar Standard Setting) Maximum Differential=210 bar
B	3.5-105 bar (14 bar Standard Setting) Maximum Differential=210 bar
C	10.5-420 bar (14 bar Standard Setting)
D	1.7-55 bar (14 bar Standard Setting) Maximum Differential=140 bar
E	1.7-28 bar (14 bar Standard Setting) Maximum Differential=140 bar
H	2-210 bar (14 bar Standard Setting) Maximum Differential=210 bar
* J	1.7-105 bar (14 bar Standard Setting)
N	4-55 bar (14 bar Standard Setting) Maximum Differential=140 bar
Q	4-28 bar (14 bar Standard Setting) Maximum Differential=140 bar
* S	1.7-14 bar (7 bar Standard Setting)
W	10.5-315 bar (14 bar Standard Setting)

* Maximum differential pressure...Any technical questions, please feel free to consult with our sales dept.