


TECHNICAL DATA	
Max. Operating pressure:	350 bar
Rated flow:	320 l/min
Cavity-Tooling:	19A-3 (19AB-3)
Installation torque:	465 - 500 Nm
Weight:	1.50 kg

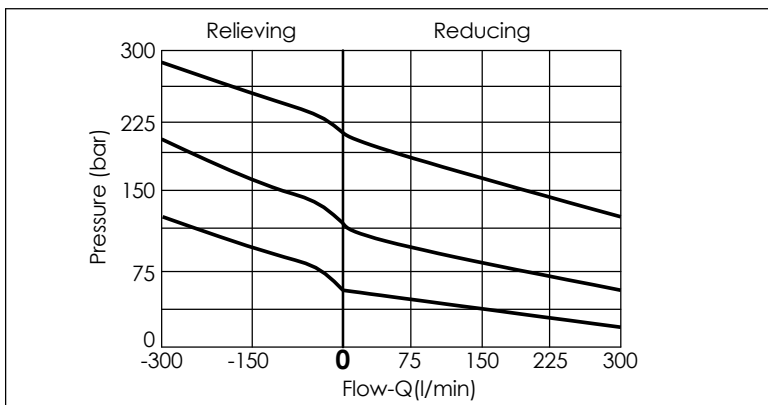

X	OPERATION	
30	Standard Type	
• Maximum Leakage Approximately (80 cc/min./70 bar)		

Z	OPTIONS	
L	Leakproof hex. socket screw.	
LP	Leakproof hex. socket screw. With stainless steel external metal components	
C	Stainless Steel Tamper Resistant Cover.	
K	Handknob with Lock Knob. (Order Code: 6ZAK001)	

Y	SPRINGS	
	ADJUSTMENT RANGES	
A	50 - 210 bar	(70 bar Standard Setting)
B	20 - 105 bar	(35 bar Standard Setting)
D	14 - 55 bar	(28 bar Standard Setting)
E	7 - 28 bar	(14 bar Standard Setting)
W	76 - 315 bar	(76 bar Standard Setting)