
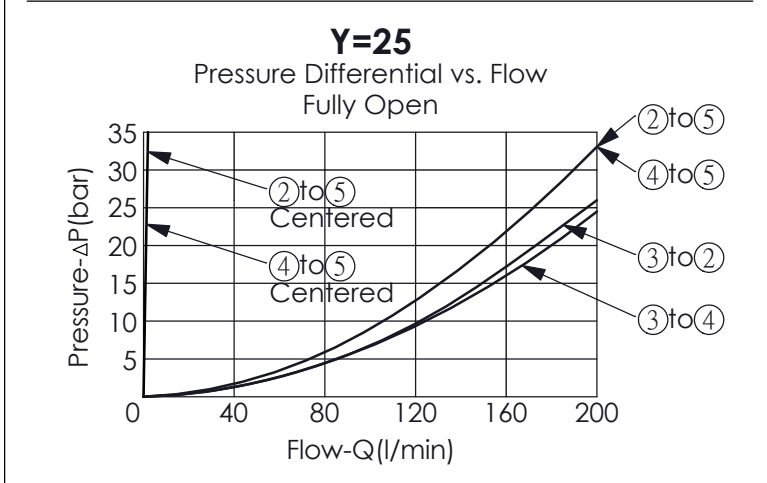


TECHNICAL DATA	
Max. Operating pressure:	350 bar
Rated flow:	140 l/min
Cavity-Tooling:	53A-6
Installation torque:	200 - 215 Nm
Weight:	1.34 kg
<ul style="list-style-type: none"> <li>Minimum Pilot Pressure Required to Shift Valve: 3.5 - 8 bar.</li> <li>Pilot Pressure Required for Full Shift at Rated Flow: 20 - 23 bar.</li> <li>Nominal operating pressures for port ① and port ⑥ should not exceed 35 bar.</li> </ul>	

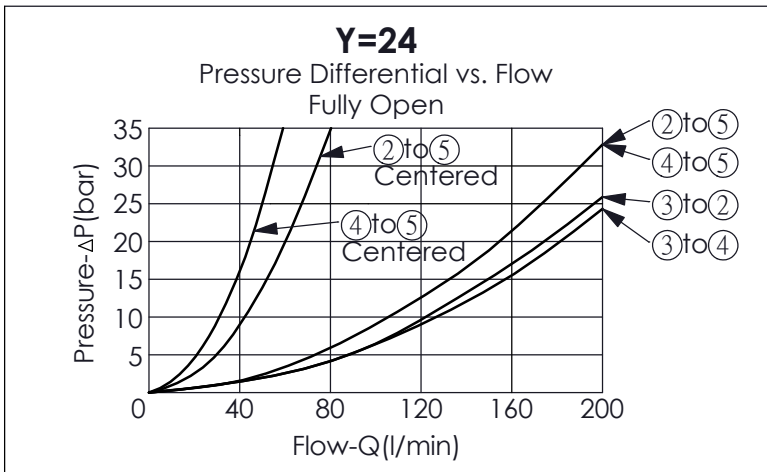

X	STRUCTURE
<b>6P</b>	Ports ① and ⑥ Pilot
<ul style="list-style-type: none"> <li>Maximum Leakage Approximately (40 cc/min./70 bar)</li> </ul>	

Y	OPERATION
<b>24</b>	② and ④ to ⑤ Center
<b>25</b>	② and ④ Bleed to ⑤ Center

Z	OPTIONS
<b>140</b>	140 LPM
<b>140P</b>	140 LPM, With stainless steel external metal components