



FLOW CONTROL VALVE (Normally Closed, Electro-Proportional, Pressure compensated)

Ordering Code: **PFR-17A-X-Y-Z**

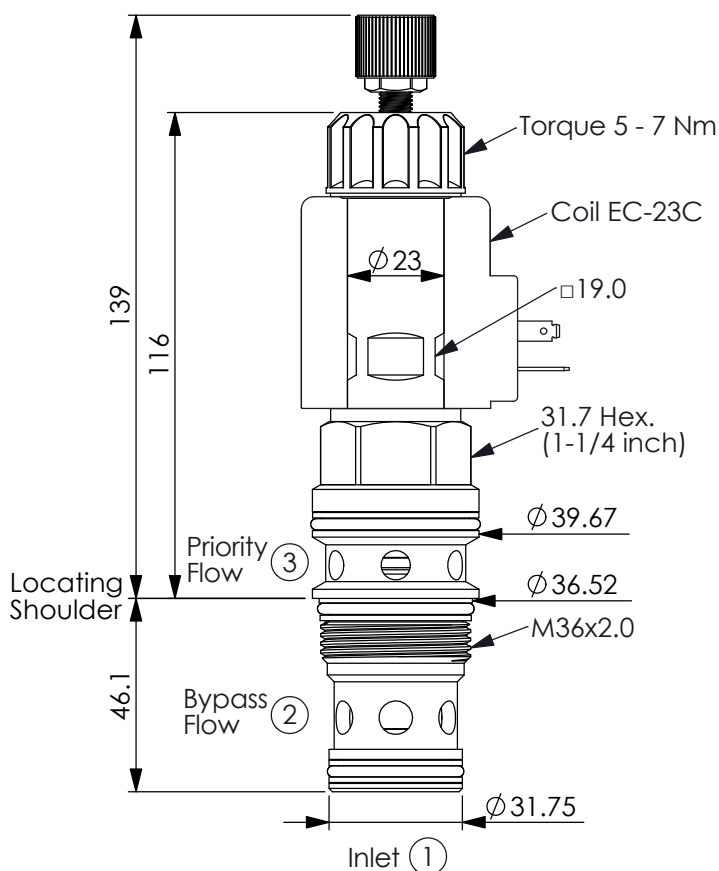


UNIT:mm

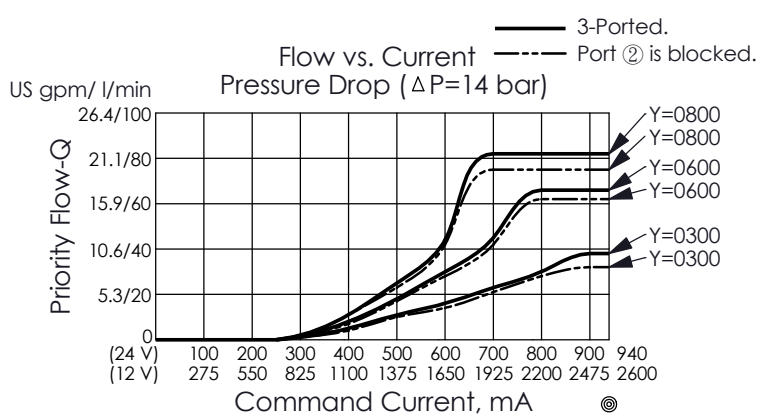

Y	PRIORITY FLOW (PORT ③)	
0300	0 - 30 LPM	
0600	0 - 60 LPM	
0800	0 - 80 LPM	

• If there is a requirement for factory minimum flow setting (port ③), please contact Winner sales department.
• For any special flow requirements, please contact Winner sales department.

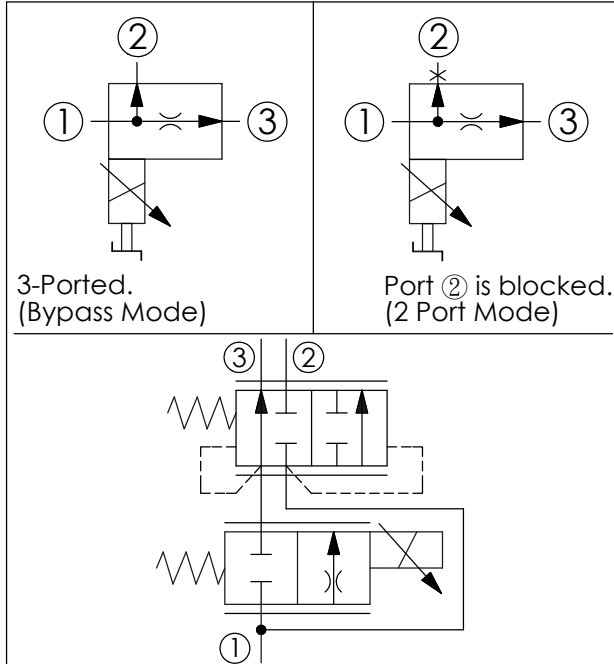

TECHNICAL DATA

Max.Operating pressure: 350 bar

Rated inlet flow: 120 l/min

Cavity-Tooling: 17A-3

Installation torque: 200 - 215 Nm

Linearity (with dither) <2%

Repeatability (with dither) <2%

Hysteresis (with dither) <4%

Hysteresis with DC input <8%

Weight:(with Coil) 1.057 (Z=M) kg
(without Coil) 0.707 (Z=M) kg

X	OPERATION	
3G	3 Ports - 17 Watt. Coil Ø 23 mm tube	

NOTE:Coil must be ordered separately.
Use 12V DC or 24V DC (Series EC-23C) coils only.

Z	OPTIONS	
M	Manual Override (Standard)	
N	Non-adjustable	