


TECHNICAL DATA	
Max.Operating pressure:	350 bar
Rated flow:	80 l/min
Cavity-Tooling:	2A-3
Installation torque:	60 - 70 Nm
Weight:	0.264 (Z=L) kg
· Control Pilot Flow (0.16 - 0.25 L/min.)	

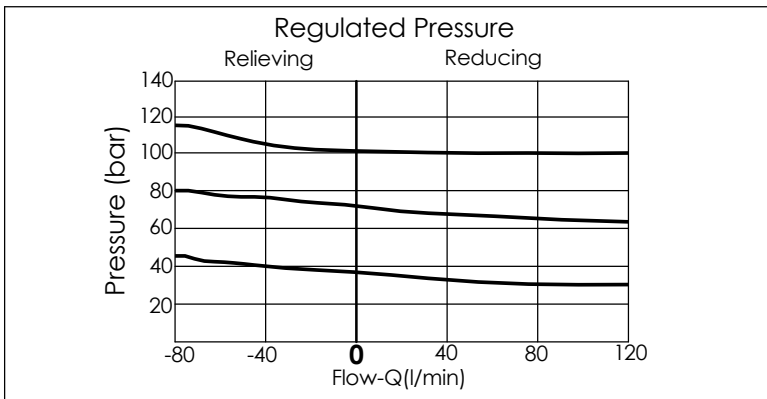

X	OPERATION	
30	Standard type Low leakage	
*33	Very good pressure control Improved dynamic response	
35	Impact resistant type Low leakage without filter	

Y	SPRINGS	
	ADJUSTMENT RANGES (X=30)(X=35)	
A	7 - 210 bar (14 bar Standard Setting)	Maximum Differential=210 bar
B	3.5 - 105 bar (14 bar Standard Setting)	Maximum Differential=210 bar
D	1.7 - 55 bar (14 bar Standard Setting)	Maximum Differential=140 bar
E	1.7 - 28 bar (14 bar Standard Setting)	Maximum Differential=140 bar
H	2 - 210 bar (14 bar Standard Setting)	Maximum Differential=210 bar
*J	1.7 - 105 bar (14 bar Standard Setting)	
*K	5 - 105 bar (14 bar Standard Setting)	
N	4 - 55 bar (14 bar Standard Setting)	Maximum Differential=140 bar
Q	4 - 28 bar (14 bar Standard Setting)	Maximum Differential=140 bar
*S	1.7 - 14 bar (7 bar Standard Setting)	
W	10.5 - 315 bar (14 bar Standard Setting)	

* When X = 33, the lowest pressure will be a bit higher than standard.
 * Maximum differential pressure...Any technical questions, please feel free to consult with our sales dept.

Z	OPTIONS	
L	Leakproof hex. socket screw.	
LP	Leakproof hex. socket screw. With stainless steel external metal components	
K	Handknob with Lock Knob. (Order Code: 6ZAK001)	